

**FPZ**  
BLOWER TECHNOLOGY

# 40DH-MD MOR

**VERSION EU**

## TECHNICAL CHARACTERISTICS

- Aluminium alloy construction
- High efficiency impeller

## OPTIONS

- Special Voltages (IEC 60038)
- Surface treatments
- Increased seal version

Data sheet

LATERAL CHANNEL BLOWERS-EXHAUSTERS



COMPANY WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2008 =

## PRESSURE

Model	N 2900 rpm [kW]	N 3500 rpm [kW]	Q max 2900 rpm [m <sup>3</sup> /h]	Q max 3500 rpm [m <sup>3</sup> /h]	ΔP max 2900 rpm [hPa] (mbar)	ΔP max 3500 rpm [hPa] (mbar)	Leq <sup>1</sup> 2900 rpm (Lp) [dB(A)]	Leq <sup>1</sup> 3500 rpm (Lp) [dB(A)]	Weight <sup>2</sup> max [kg]
40DH-MD	2,2	2,55	140	165	400	350	71,7	74,7	34
	3	3,45	140	165	500	500	72	75	38

## VACUUM

Model	N 2900 rpm [kW]	N 3500 rpm [kW]	Q max 2900 rpm [m <sup>3</sup> /h]	Q max 3500 rpm [m <sup>3</sup> /h]	ΔP max 2900 rpm [hPa] (mbar)	ΔP max 3500 rpm [hPa] (mbar)	Leq <sup>1</sup> 2900 rpm (Lp) [dB(A)]	Leq <sup>1</sup> 3500 rpm (Lp) [dB(A)]	Weight <sup>2</sup> max [kg]
40DH-MD	2,2	2,55	140	165	350	350	72	75	34
	3	3,45	140	165	-	-	-	-	38

## INSTALLATION

- For proper use, the blower should be equipped with INLET FILTER and Flow Relief VALVE; other accessories available on request.
- Ambient temperature from -15° to +40°C (+5° to +104° F).
- Specifications subject to change without notice.
- Before installation read carefully all instructions.

<sup>9</sup> Noise measured at 1 m distance with inlet and outlet ports piped, in accordance to ISO 3744.

<sup>10</sup> Value refers to the weight of the machine with 3 Phase motor if MOR range, without motor if GOR or GVR range.

N: Installed motor power

Q: Flow rate



ΔP: Differential pressure

Leq: Noise Level



**PRESSURE**

**2900 rpm (50 Hz)**



**3500 rpm (60 Hz)**

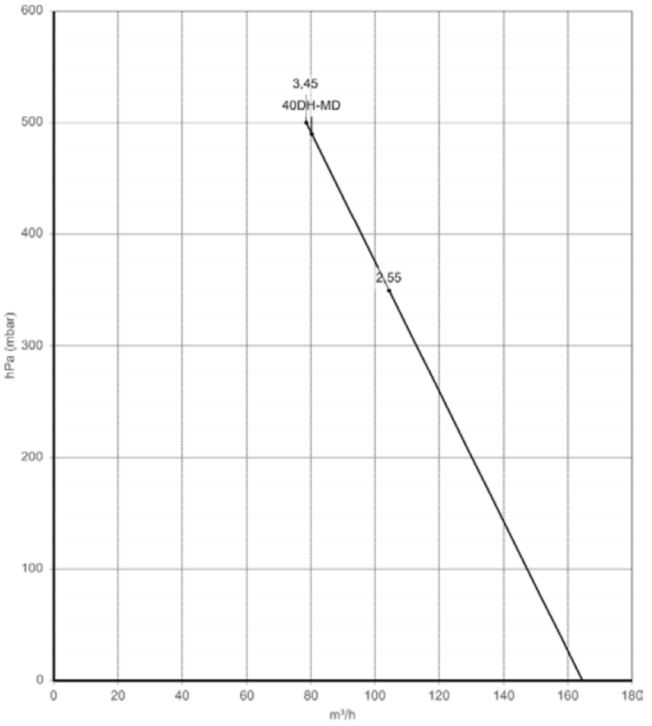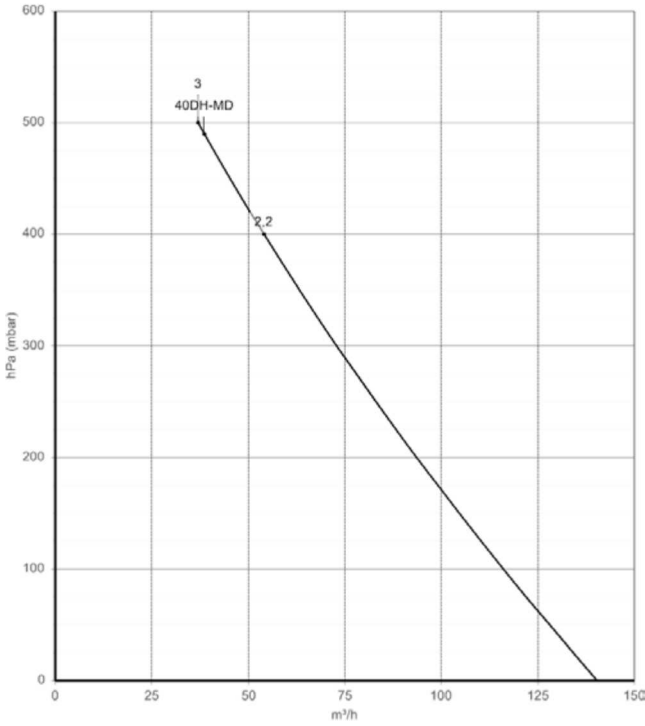

FLOW RATE

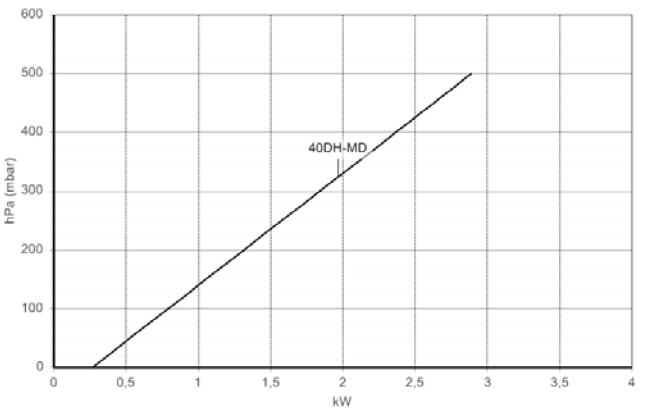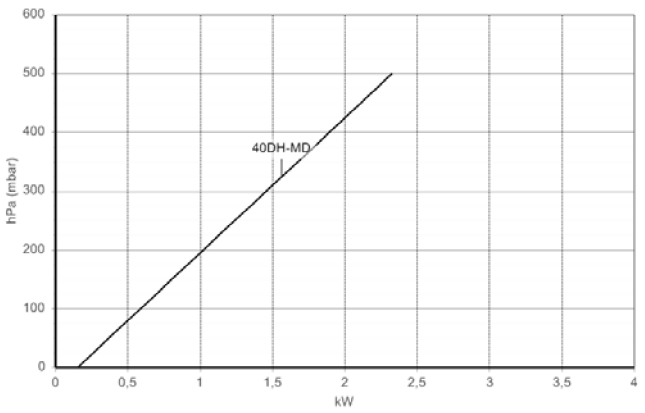

ABSORBED POWER

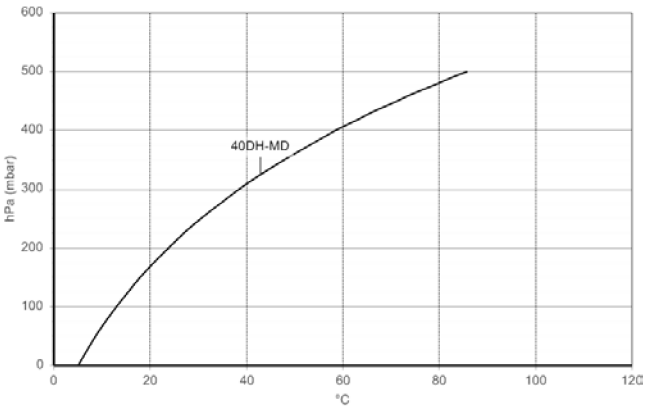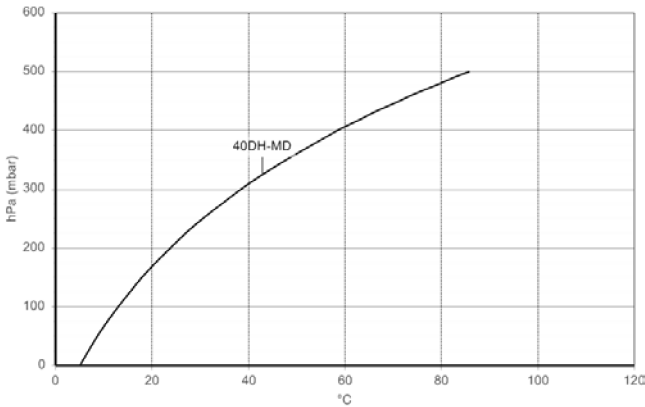



TEMPERATURE INCREASE

Curves refer to air at 20°C (68° F) temperature and 1013 mbar (29.92 In Hg) atmospheric pressure (abs) measured at inlet port.  
Values for flow, power consumption and temperature rise: ±10% tolerance.  
Data can change without prior notice.



**VACUUM**

**2900 rpm (50 Hz)**



**3500 rpm (60 Hz)**

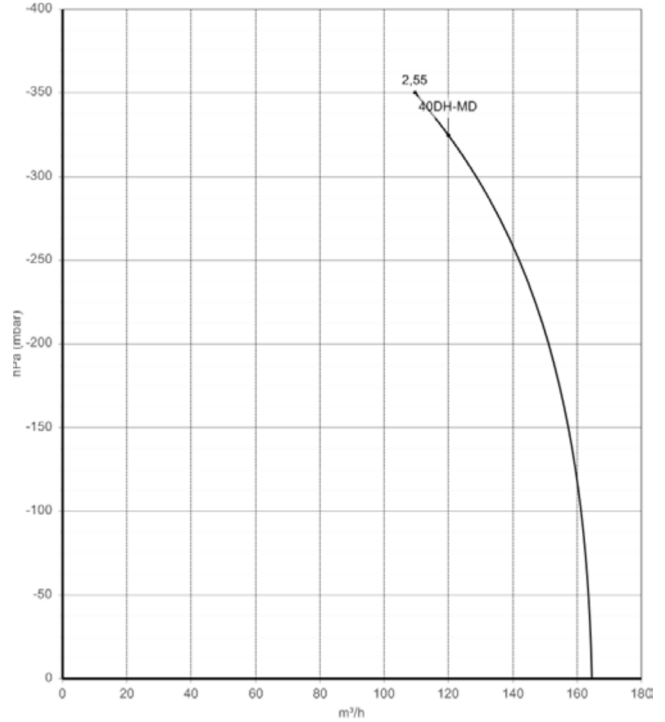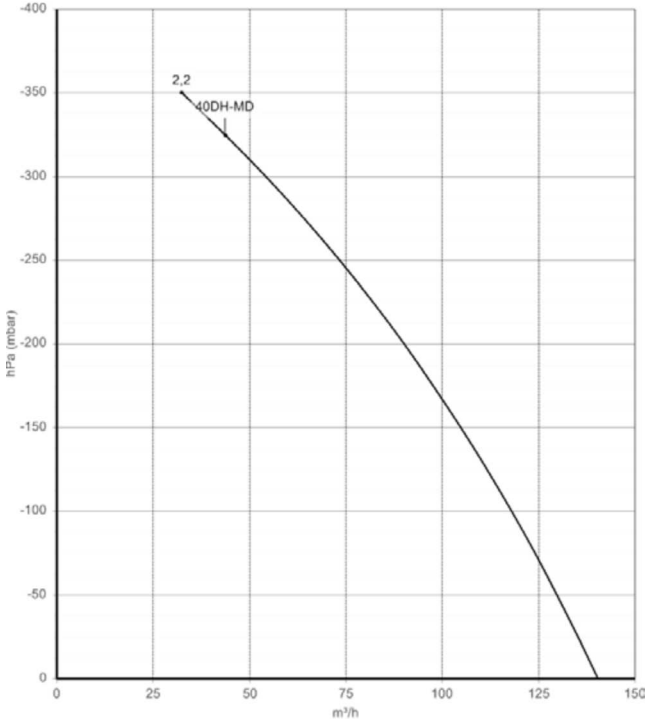

FLOW RATE

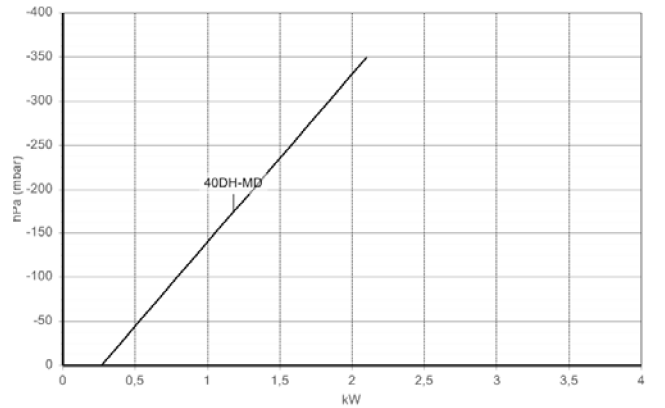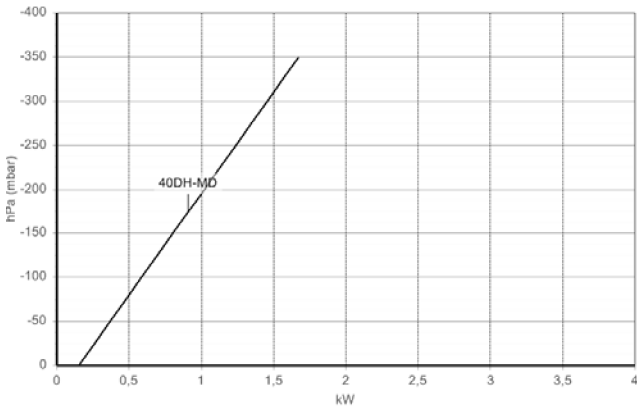


ABSORBED POWER

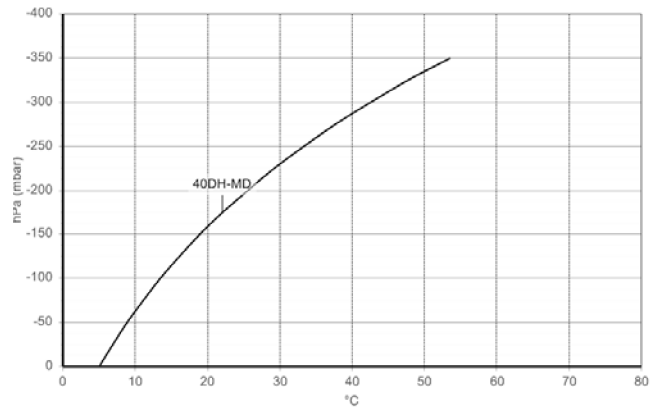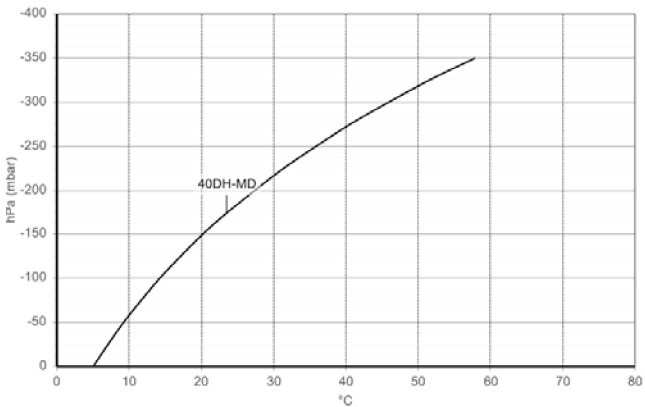

TEMPERATURE INCREASE

Curves refer to air at 20°C (68° F) temperature, measured at inlet port and 1013 mbar (29.92 In Hg) atmospheric backpressure (abs).  
Values for flow, power consumption and temperature rise: ± 10% tolerance.  
Data can change without prior notice.

**DIMENSIONS (40DH-MD)**

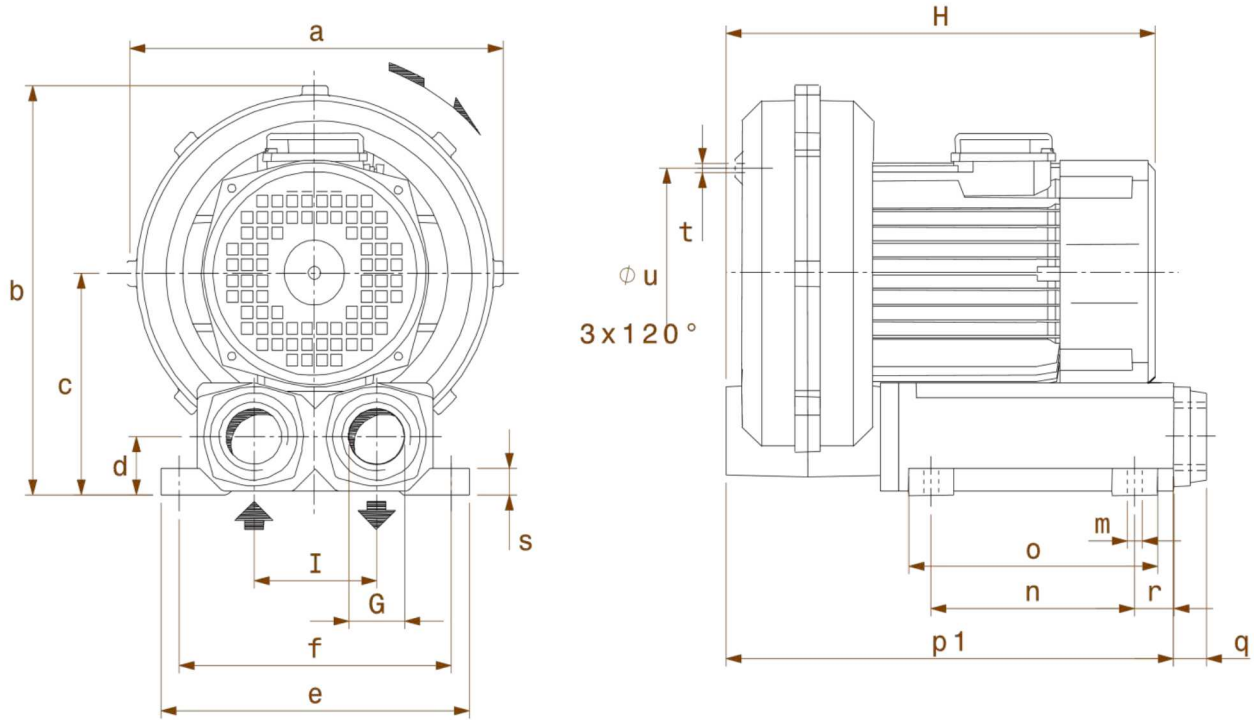

Model	a	b	c	d	e	f
40DH-MD	350	370	195	53	245	245

Model	G	H	i	m	n	o
40DH-MD	G 1"1/2	430	105	10	185	235

Model	p1	q	r	s	t	u
40DH-MD	440	18	55	20	M8	225

Dimensions in mm - FOR REFERENCE ONLY