




Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

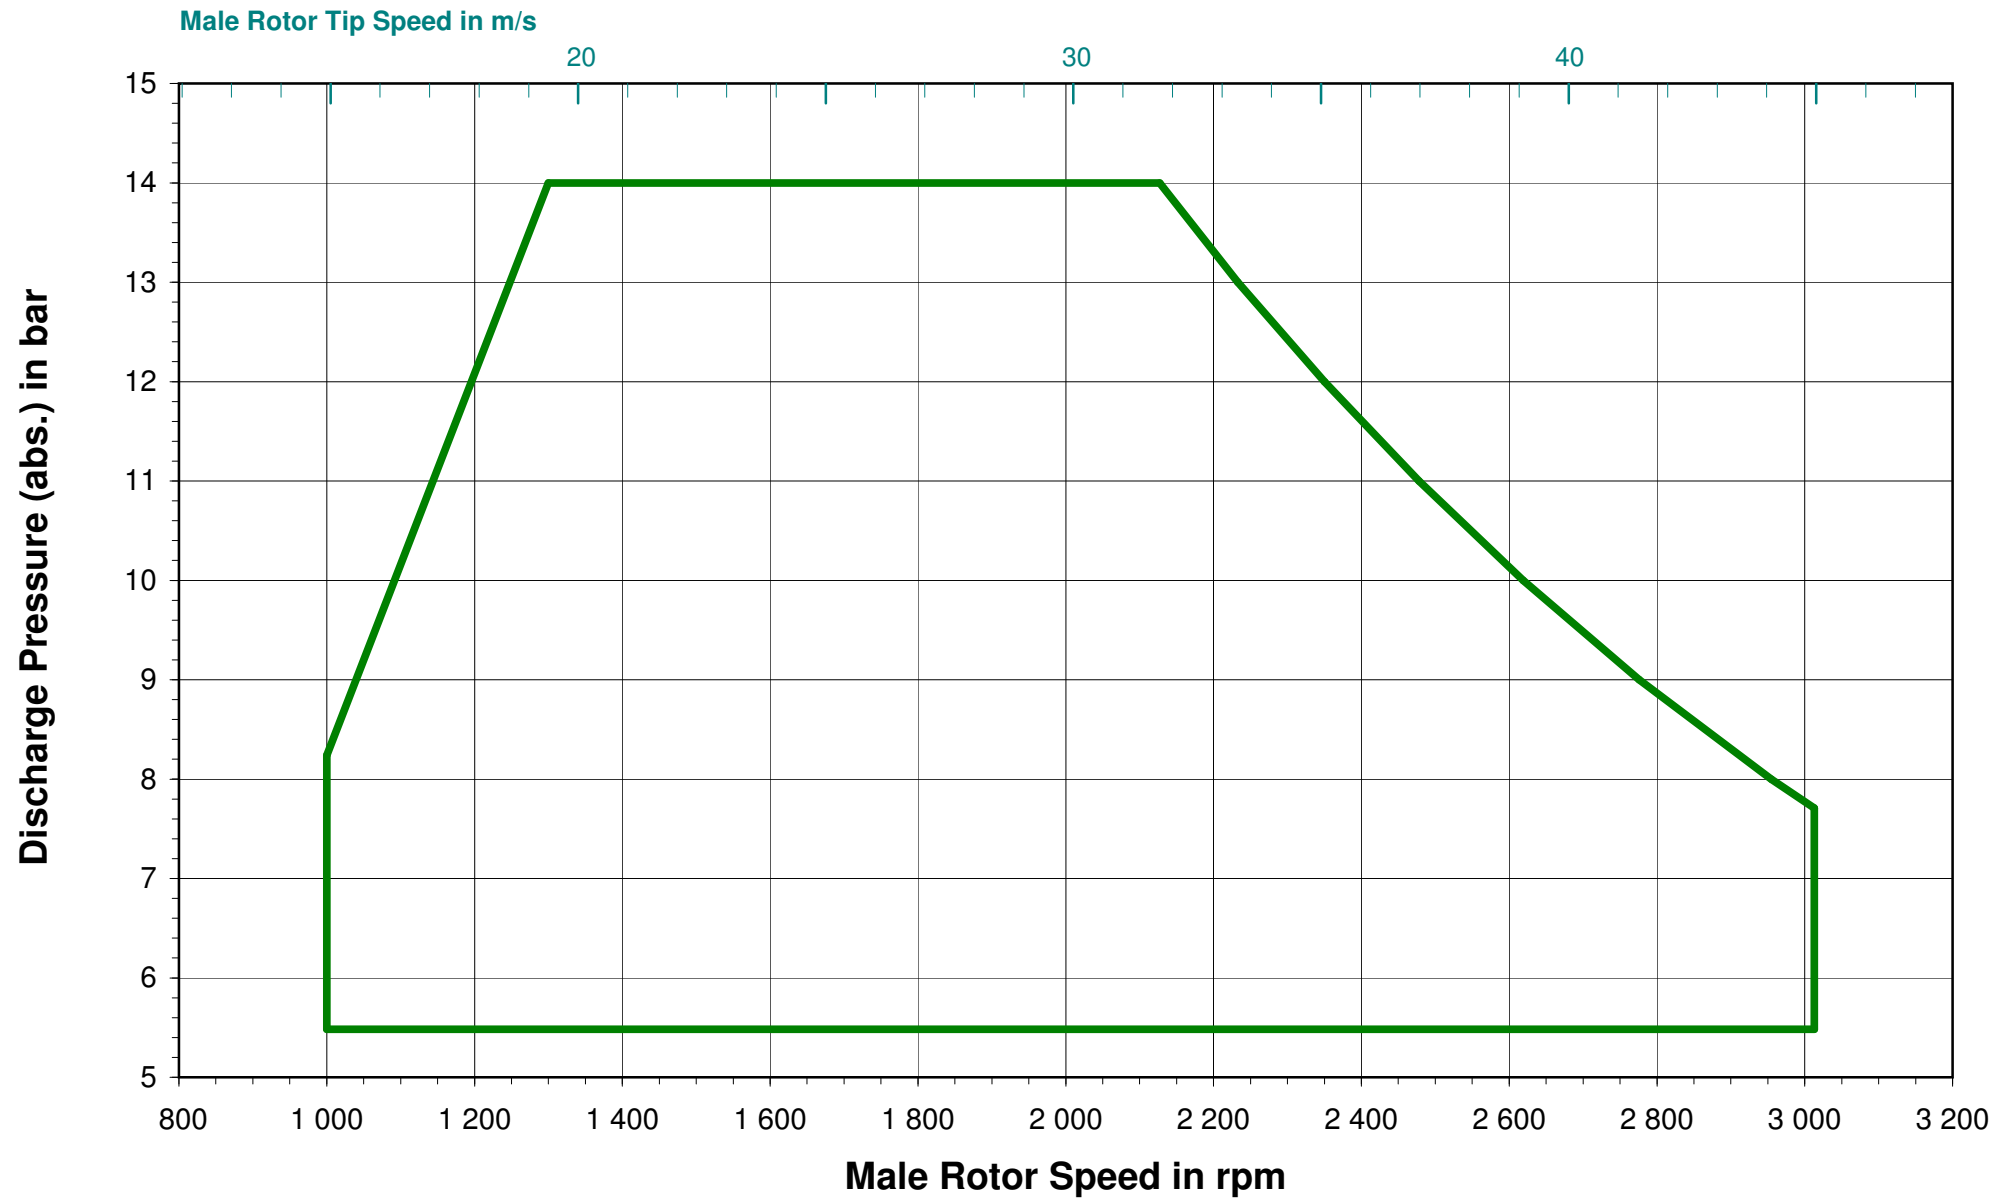


Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

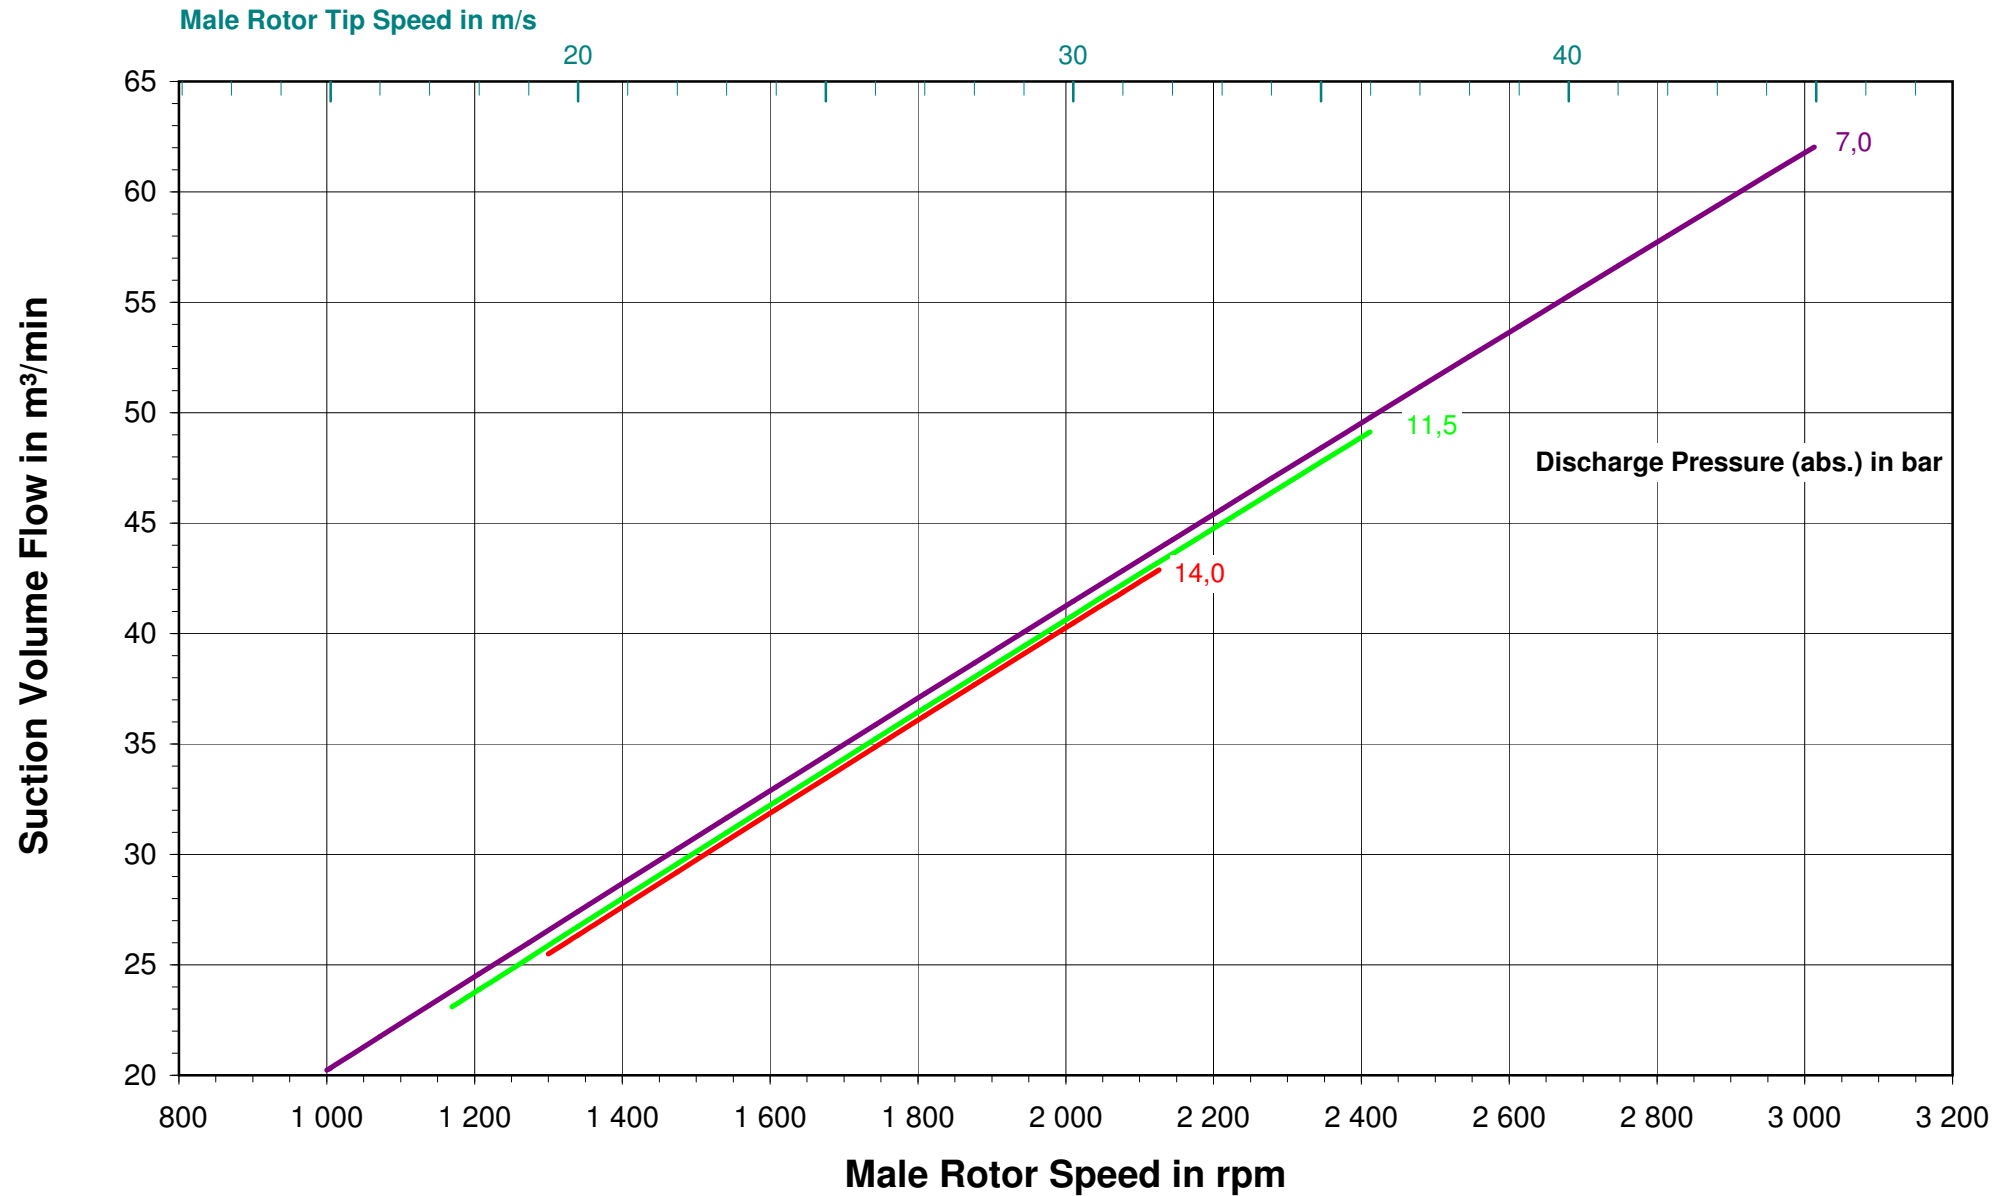


Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

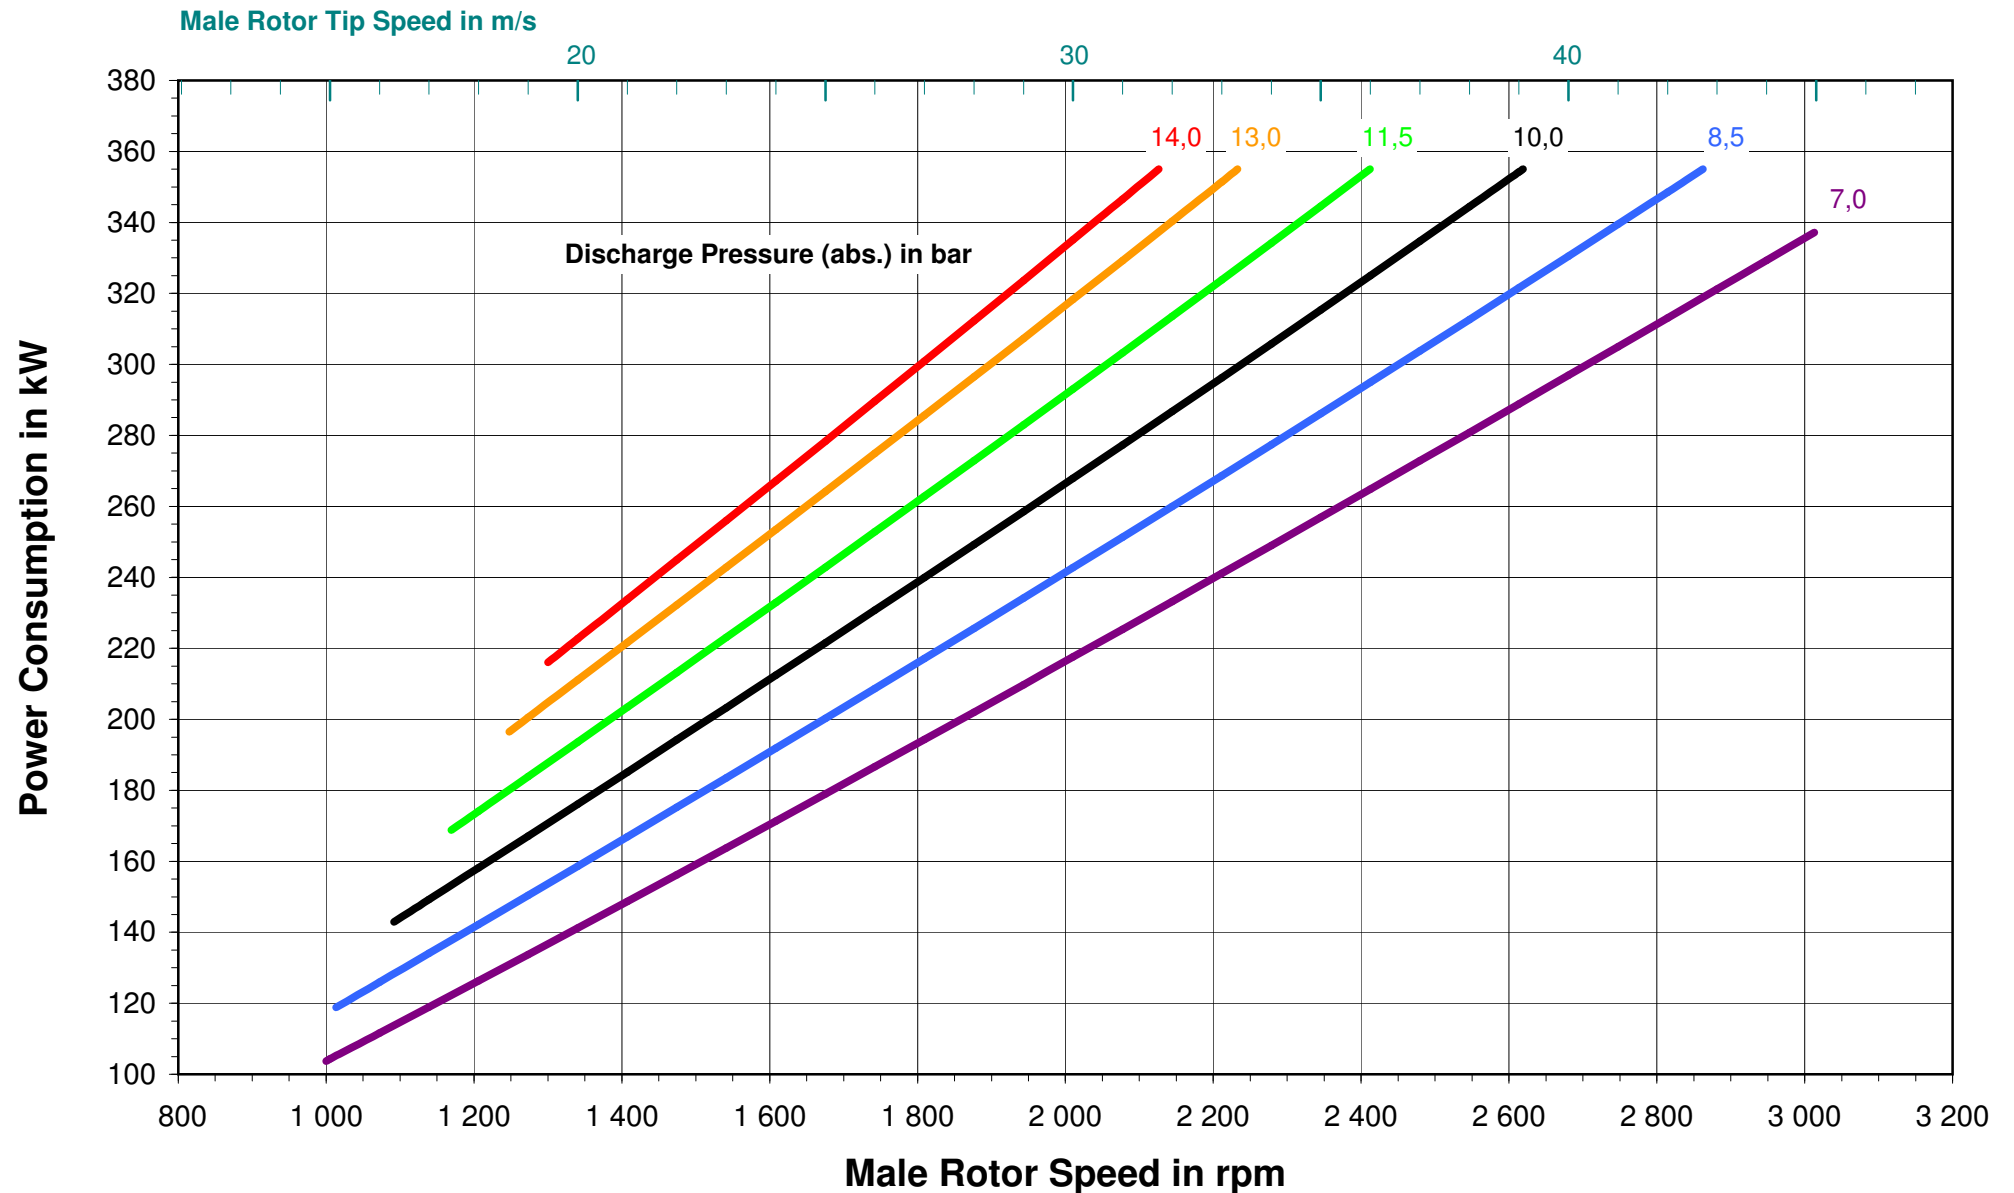

Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

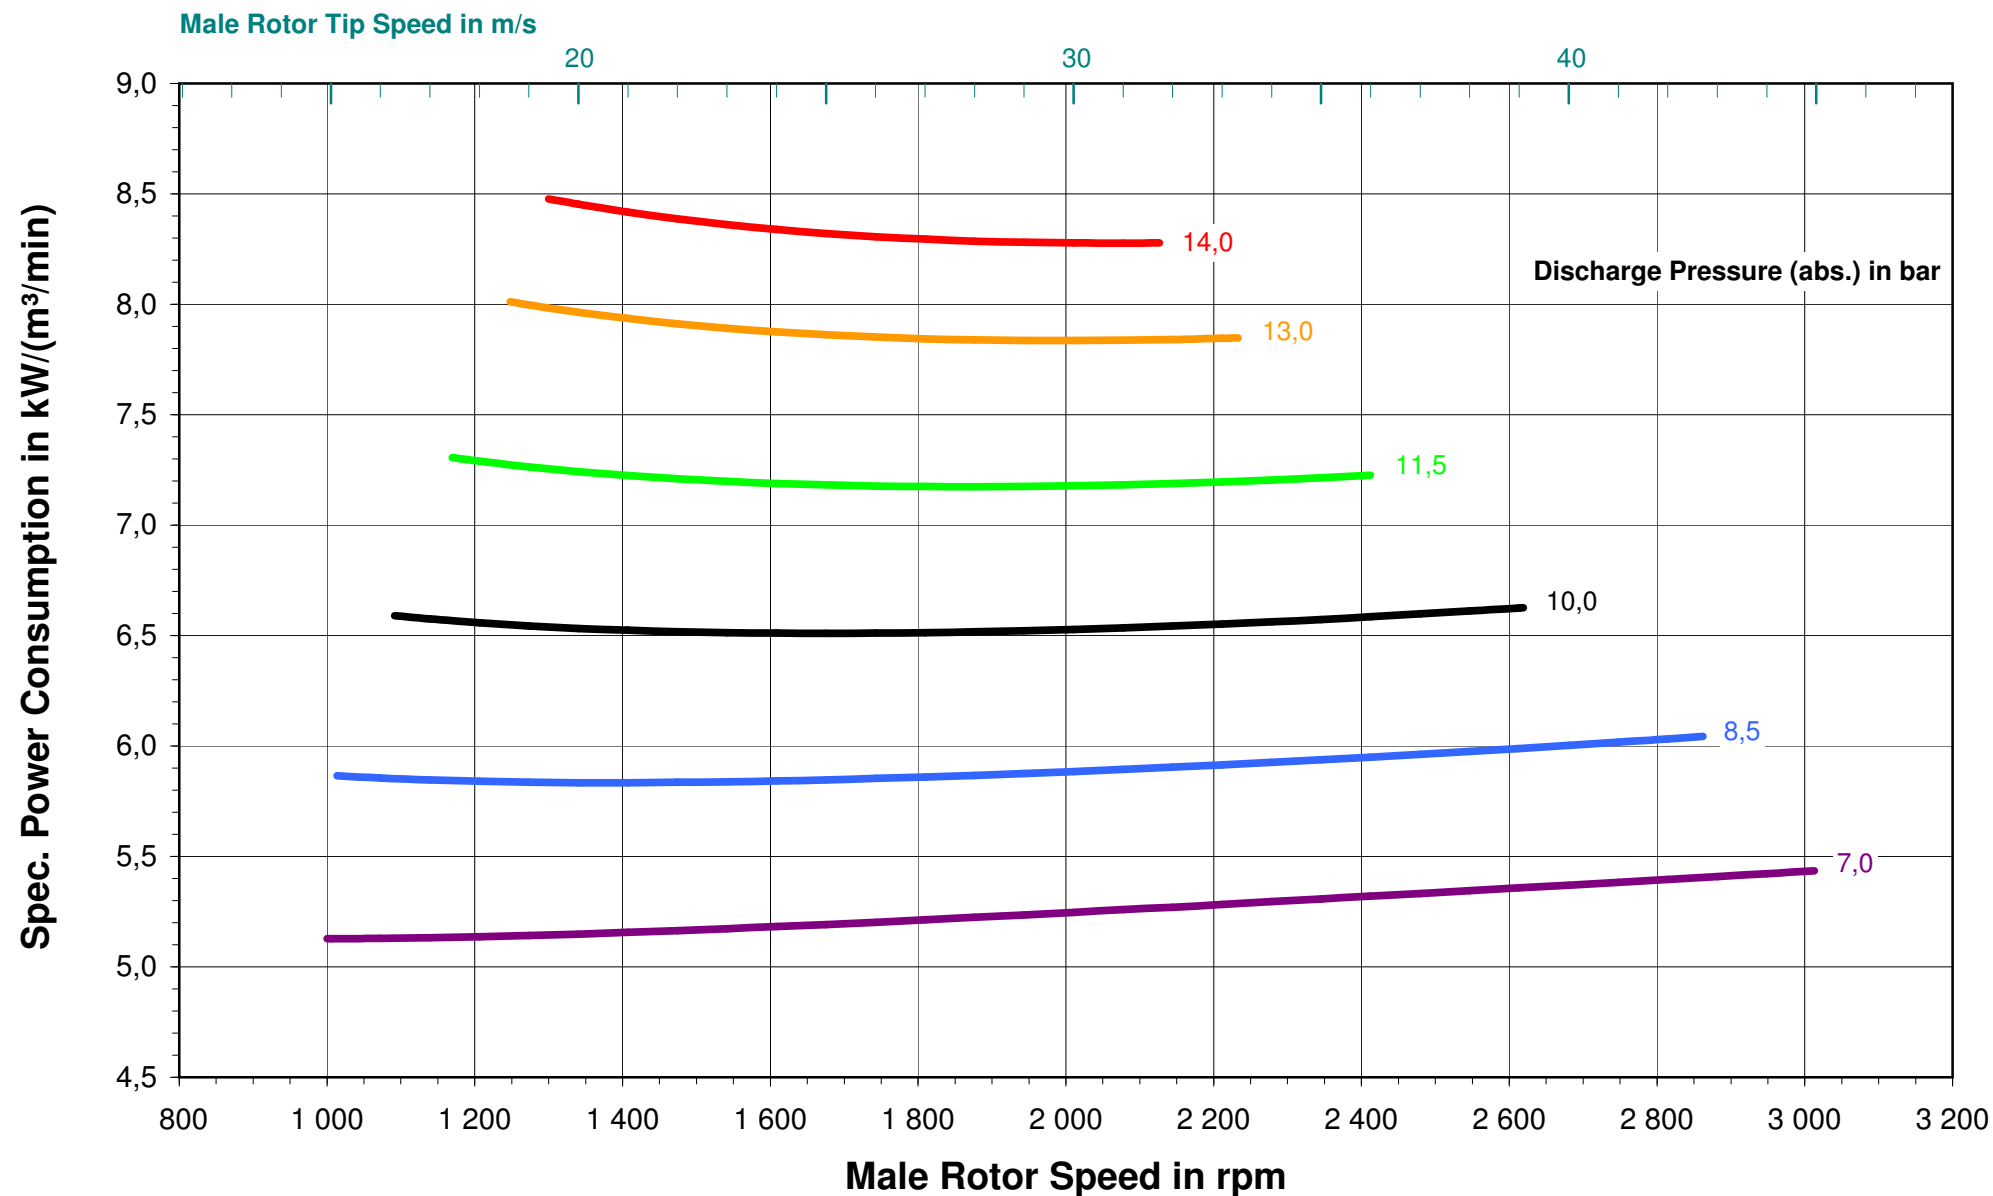


Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

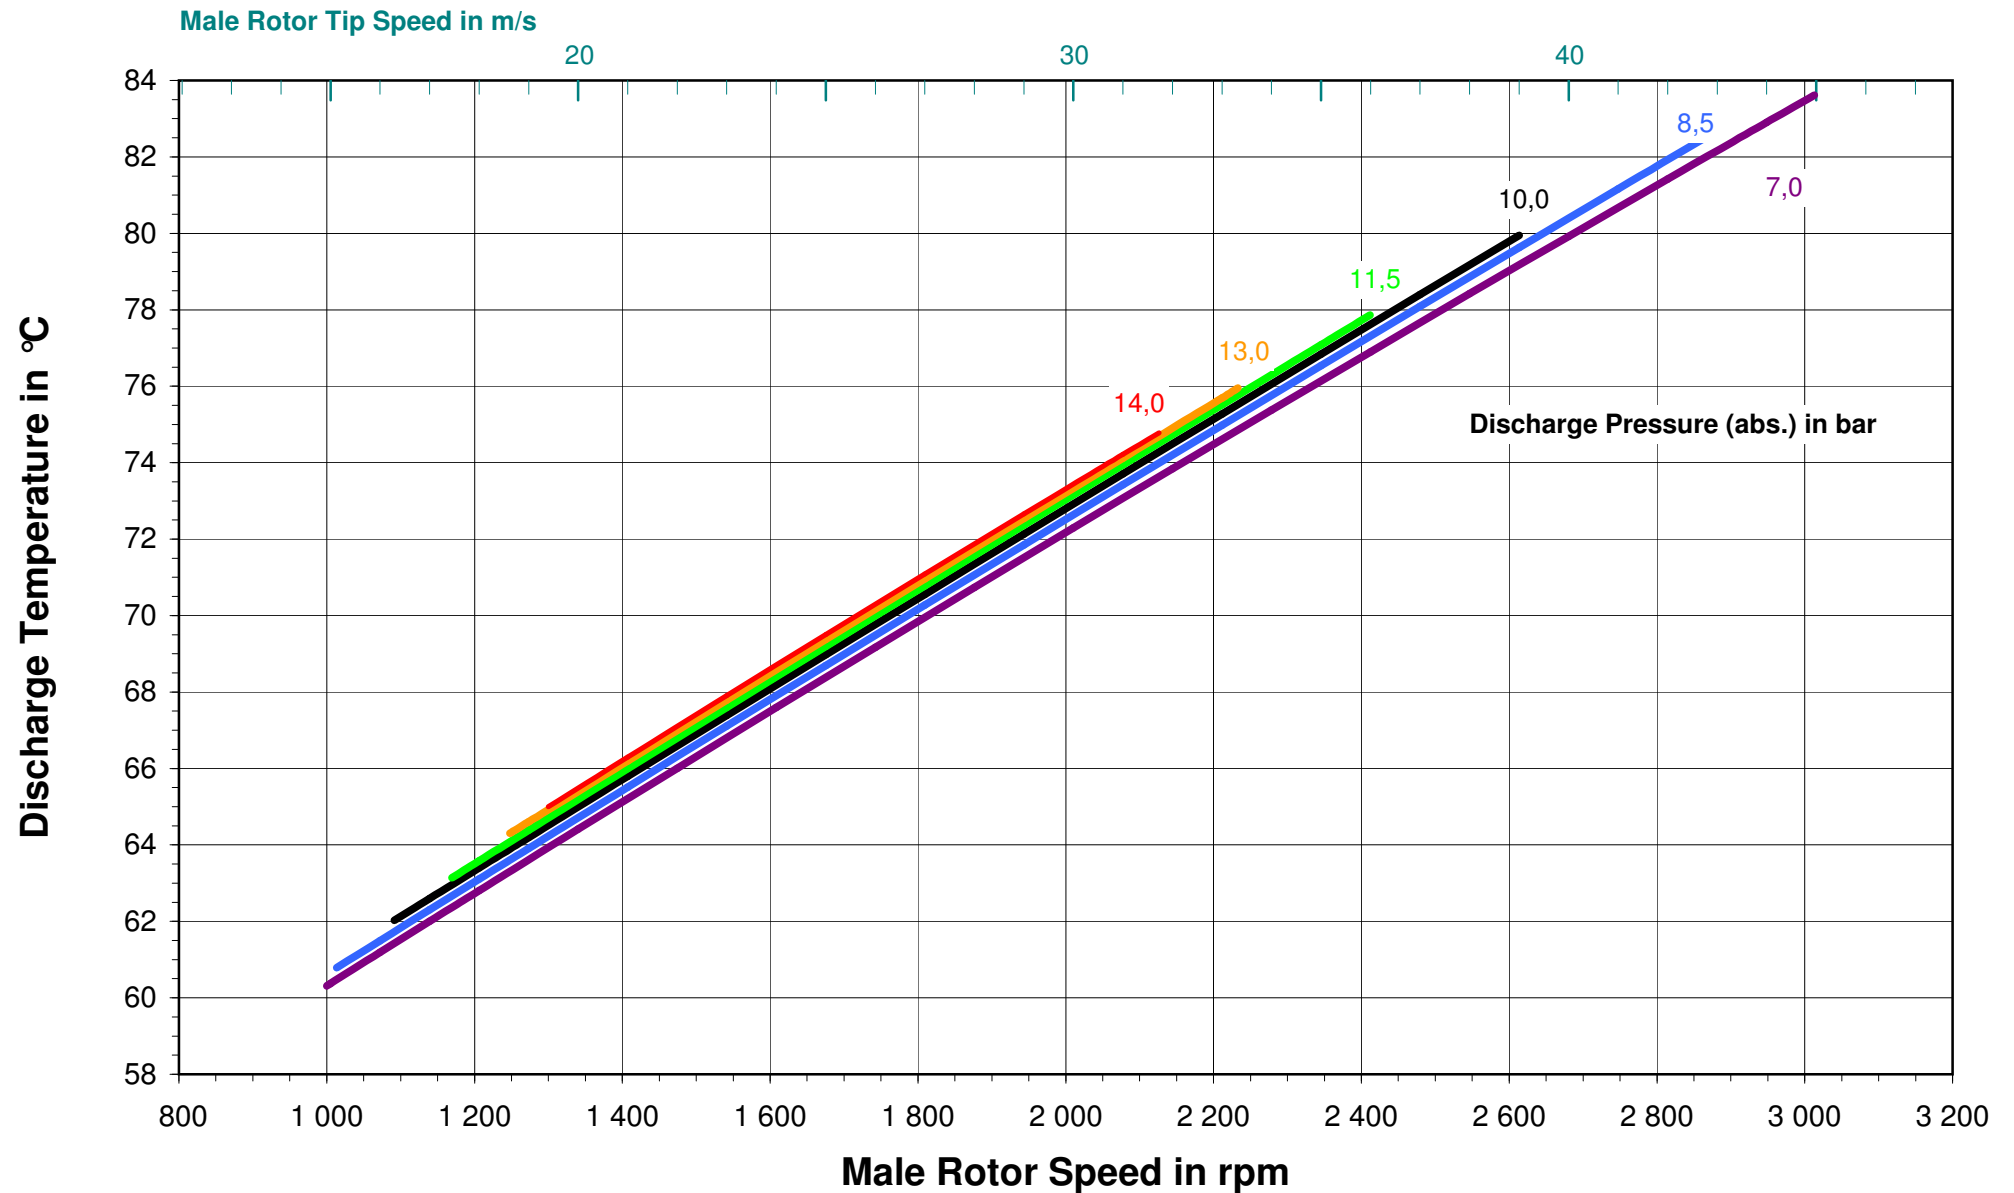


PERFORMANCE PREDICTION CE224G


Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

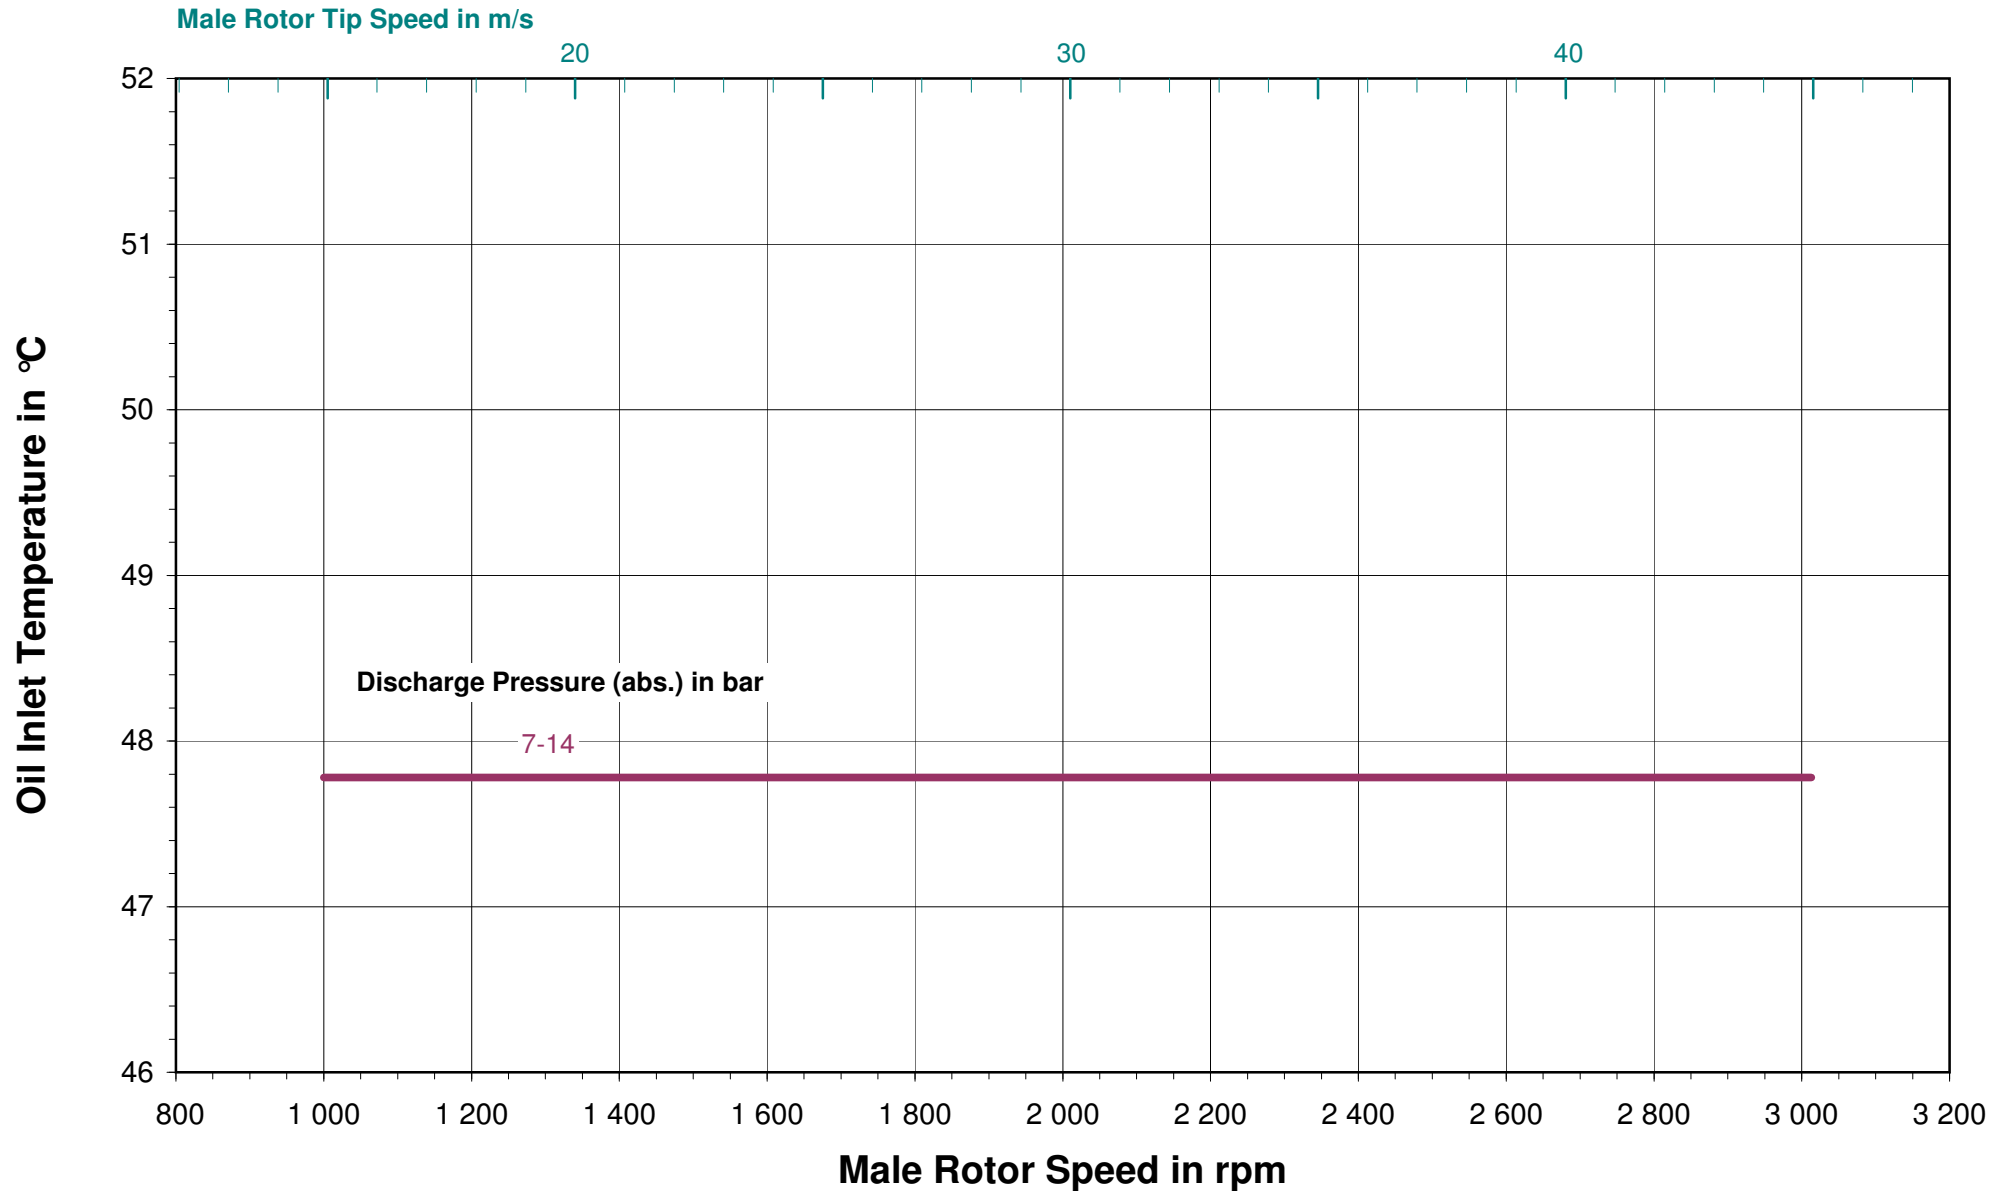


Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

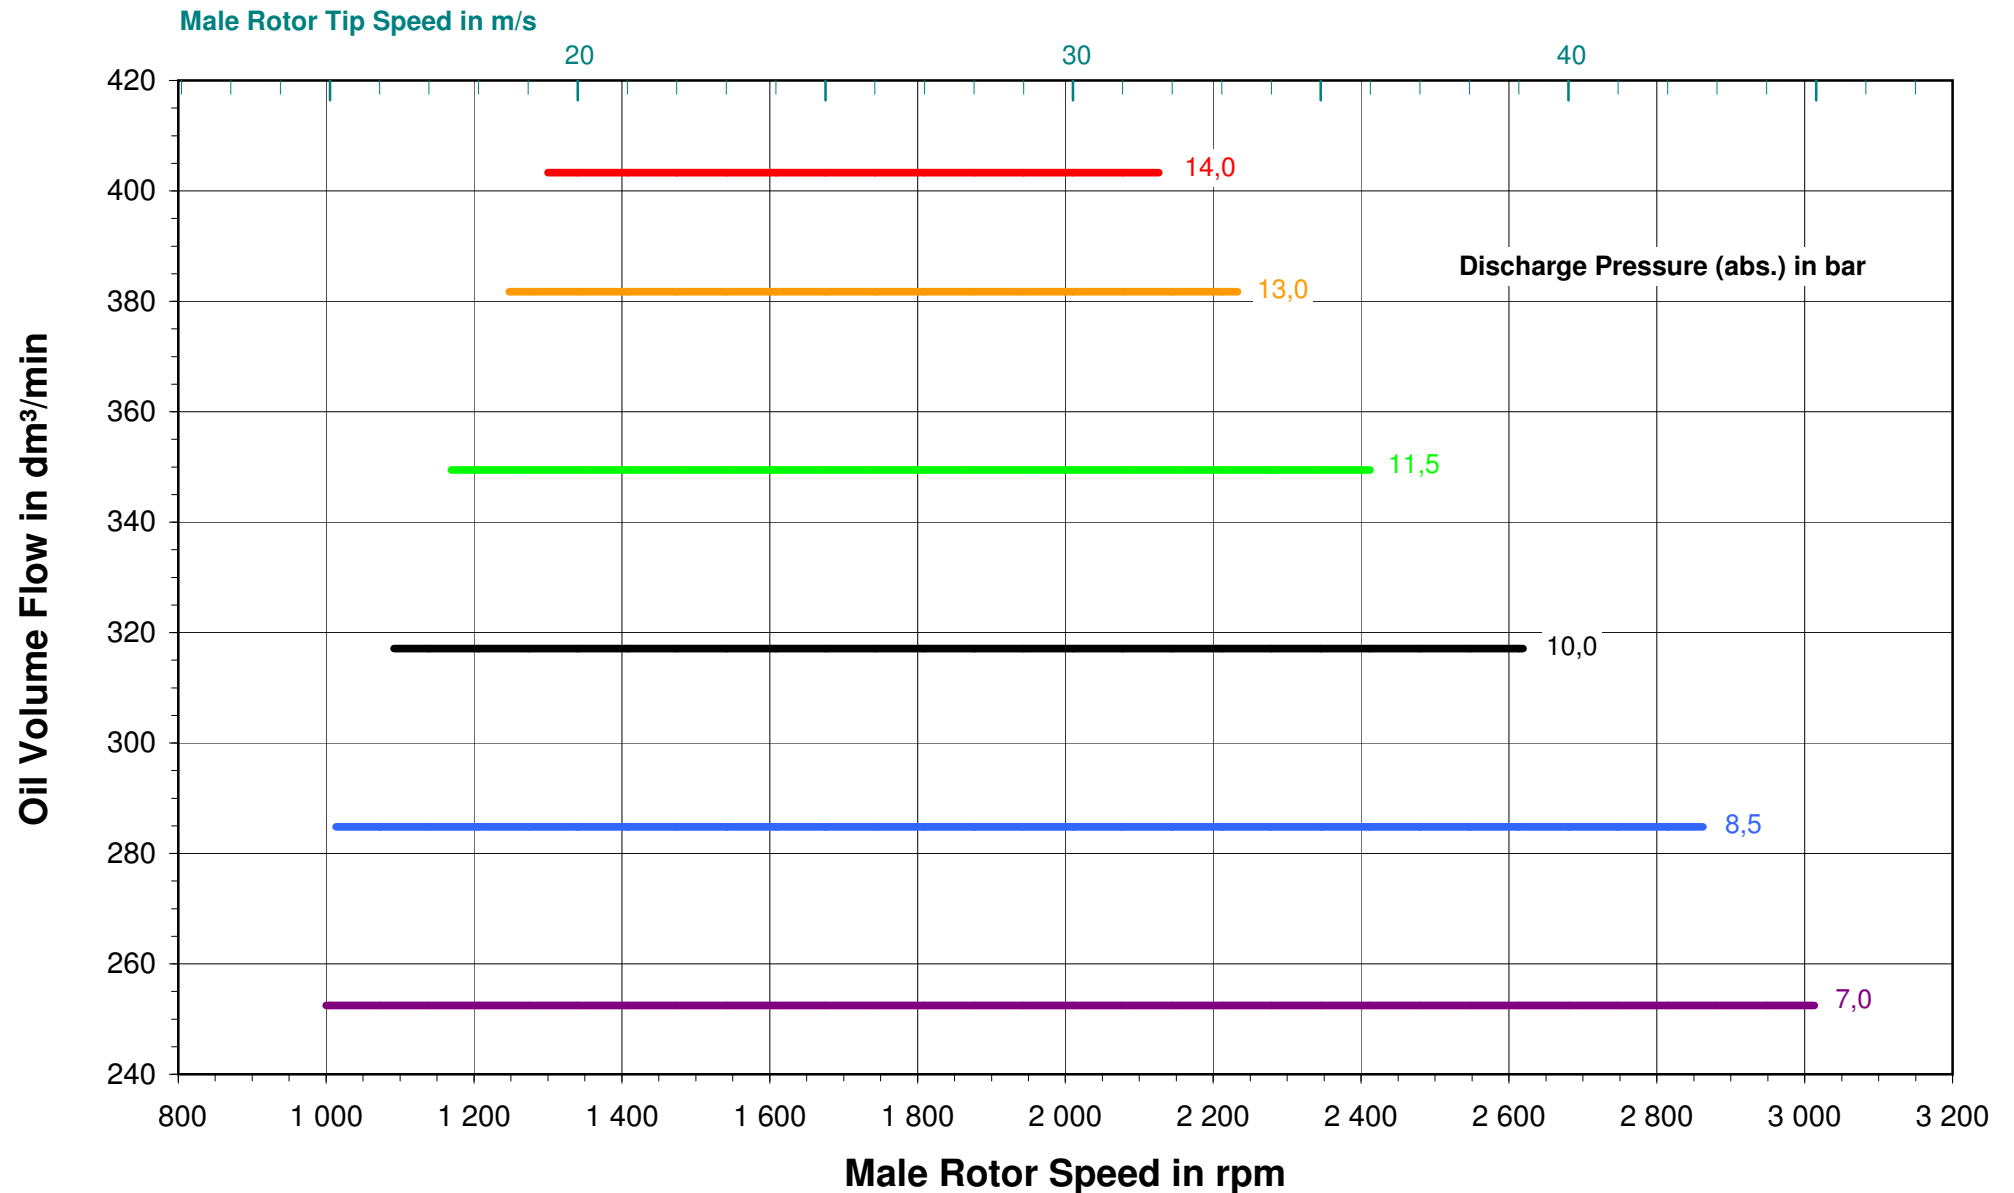


Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

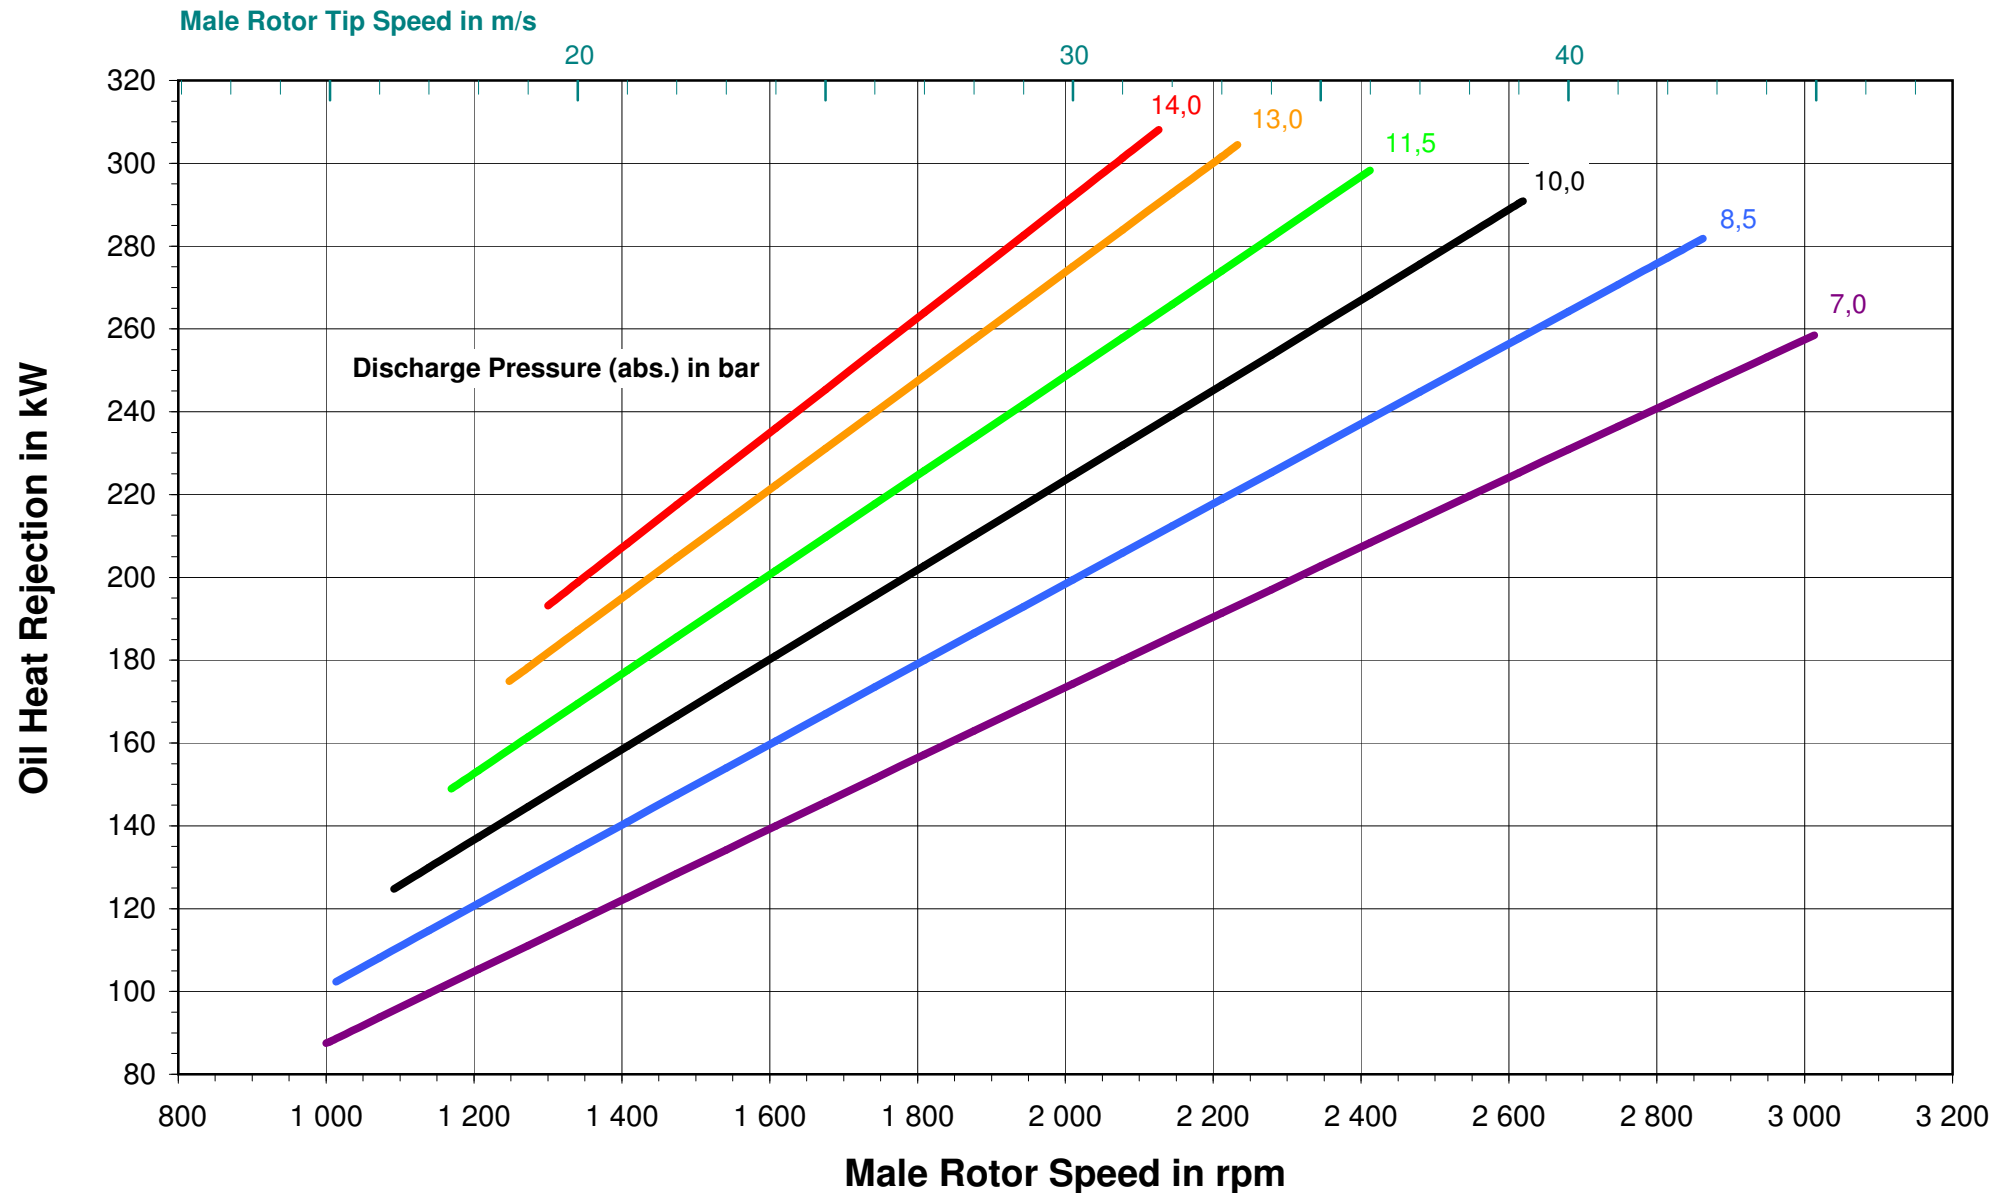


Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

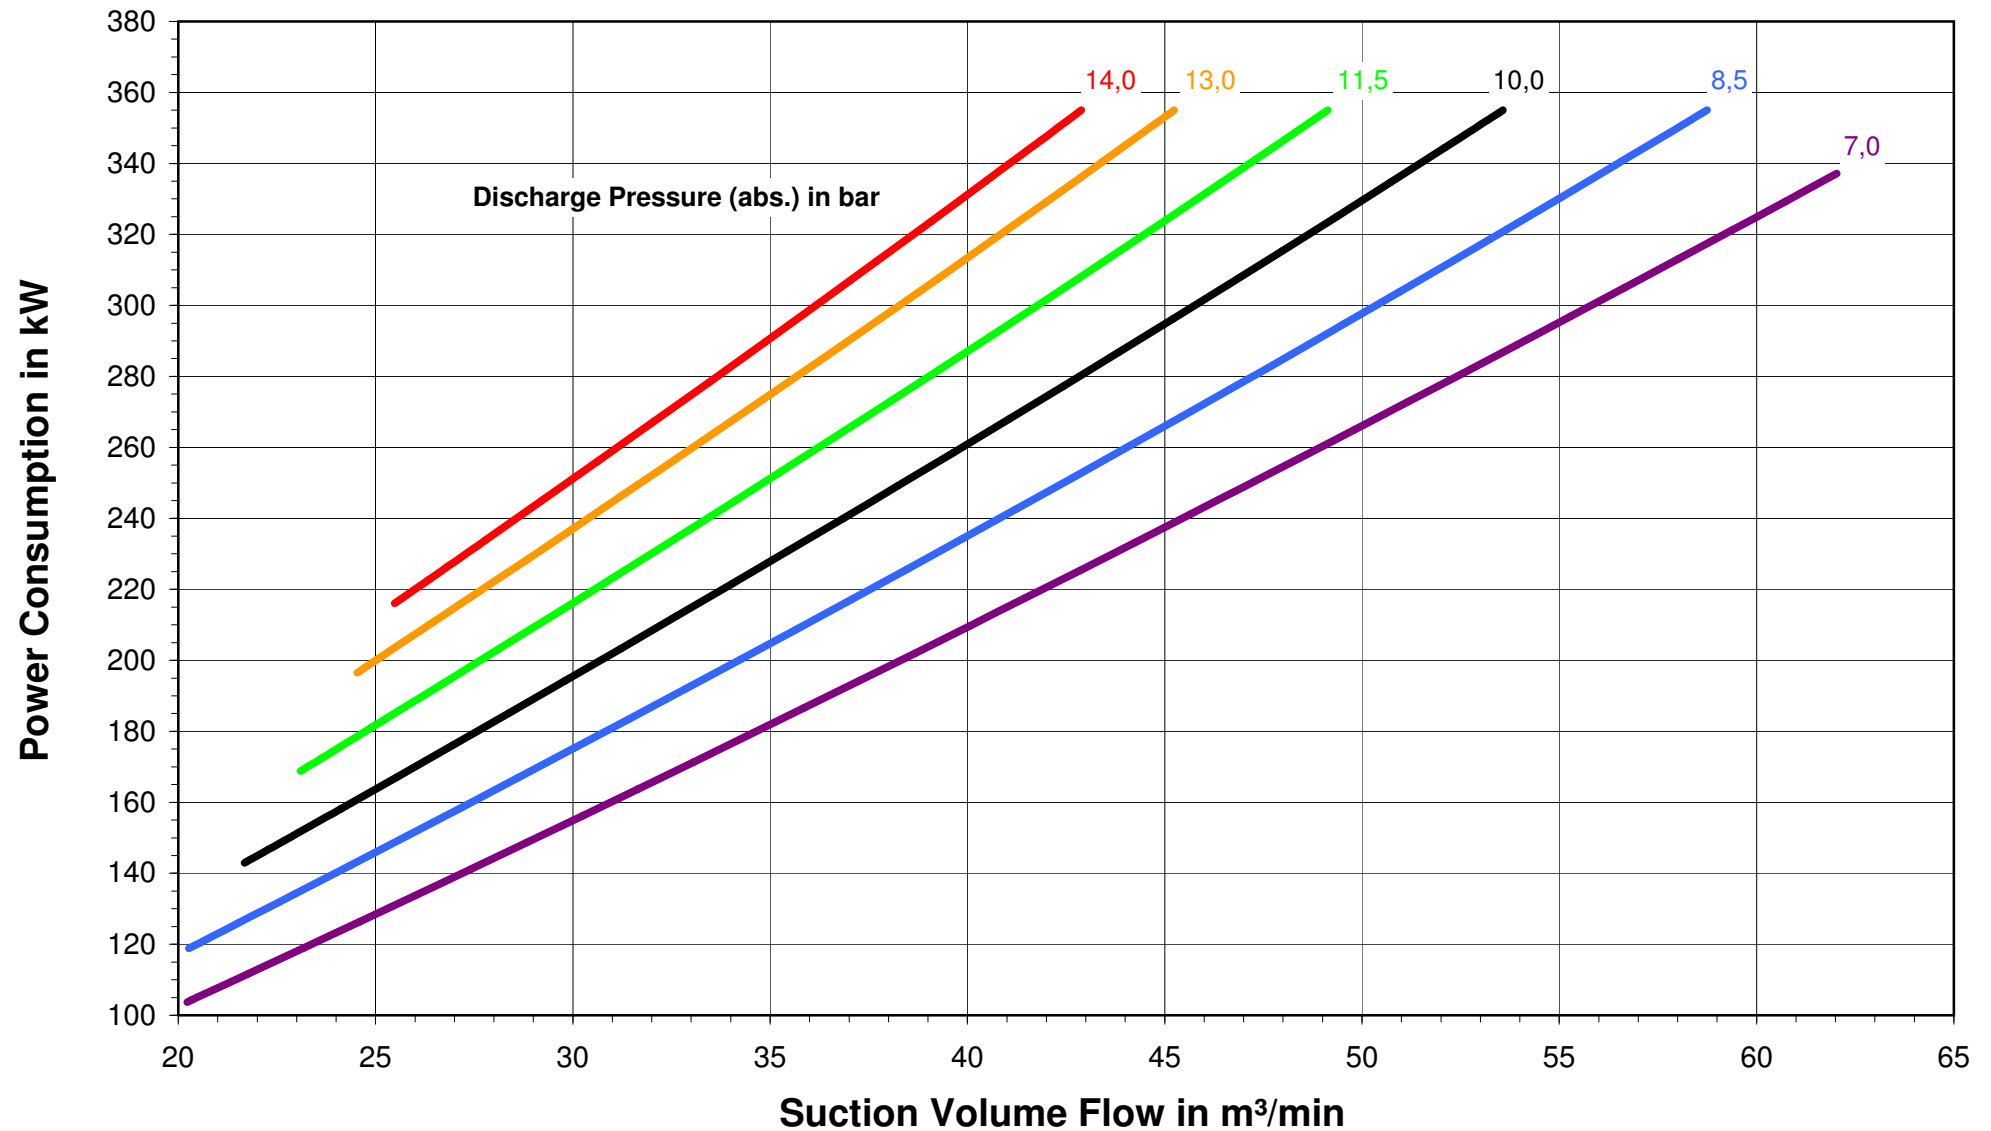

Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

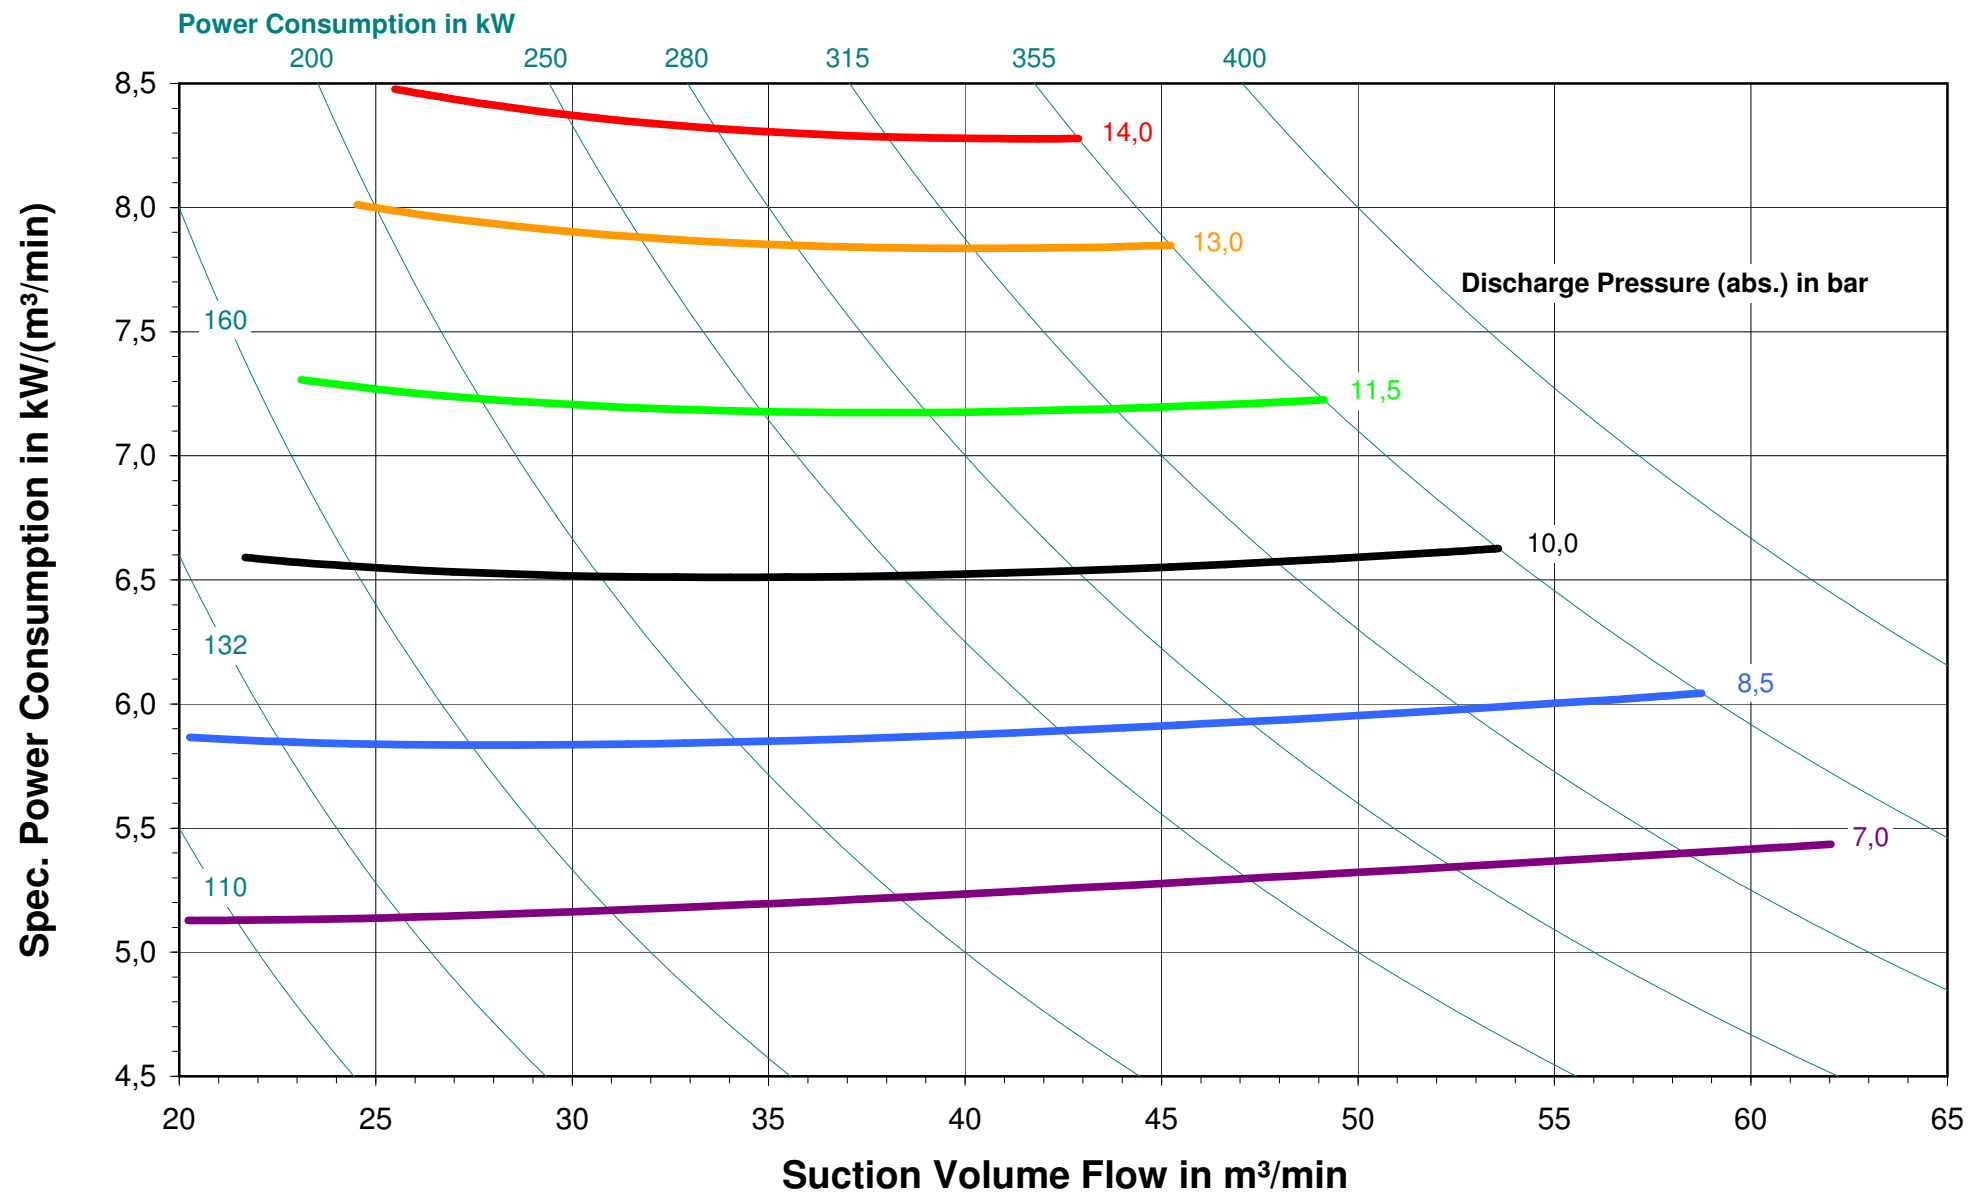

Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

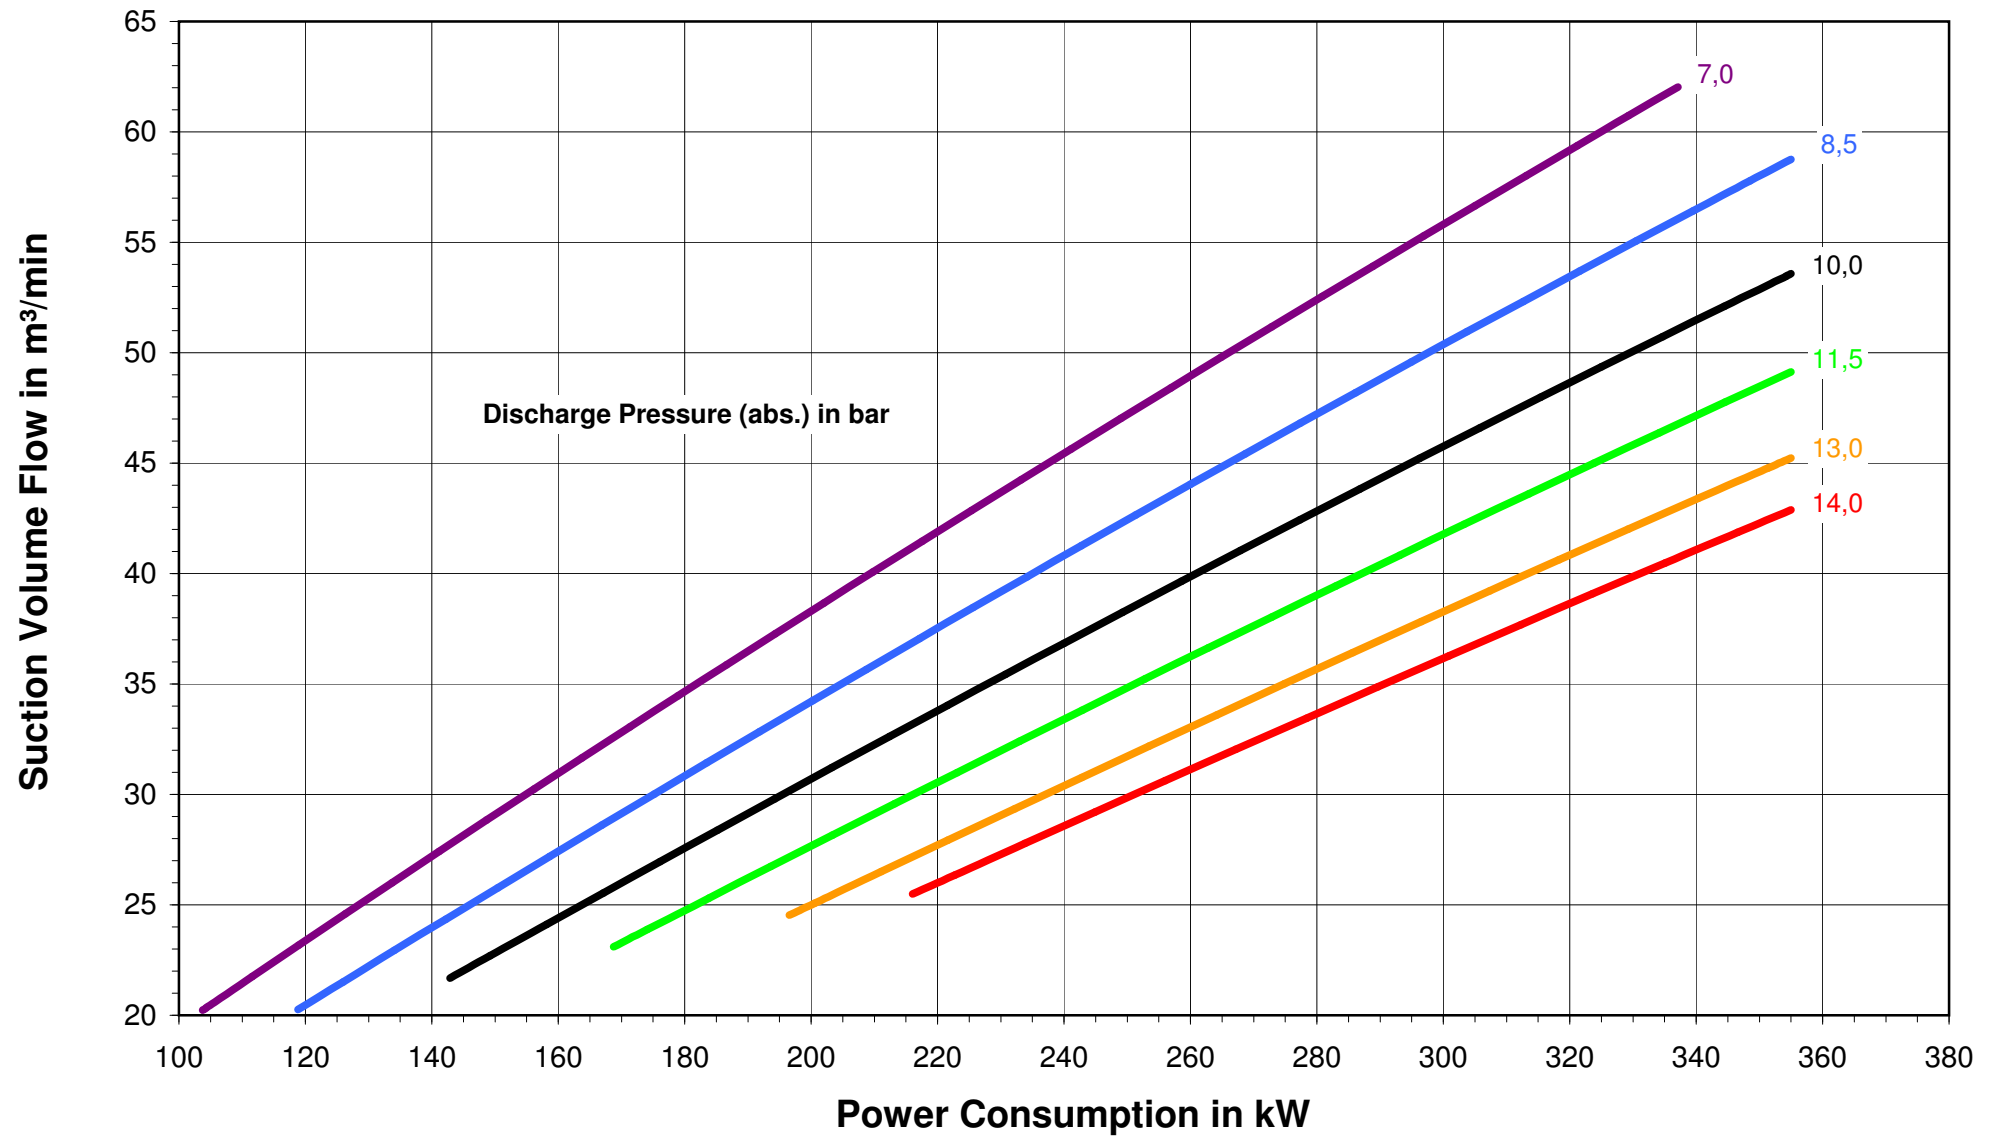

Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; oil quality: ISO VG46

