



PERFORMANCE PREDICTION CF128LG/LG2/LG3

Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; disch. temp.: 80 °C; oil quality: ISO VG46

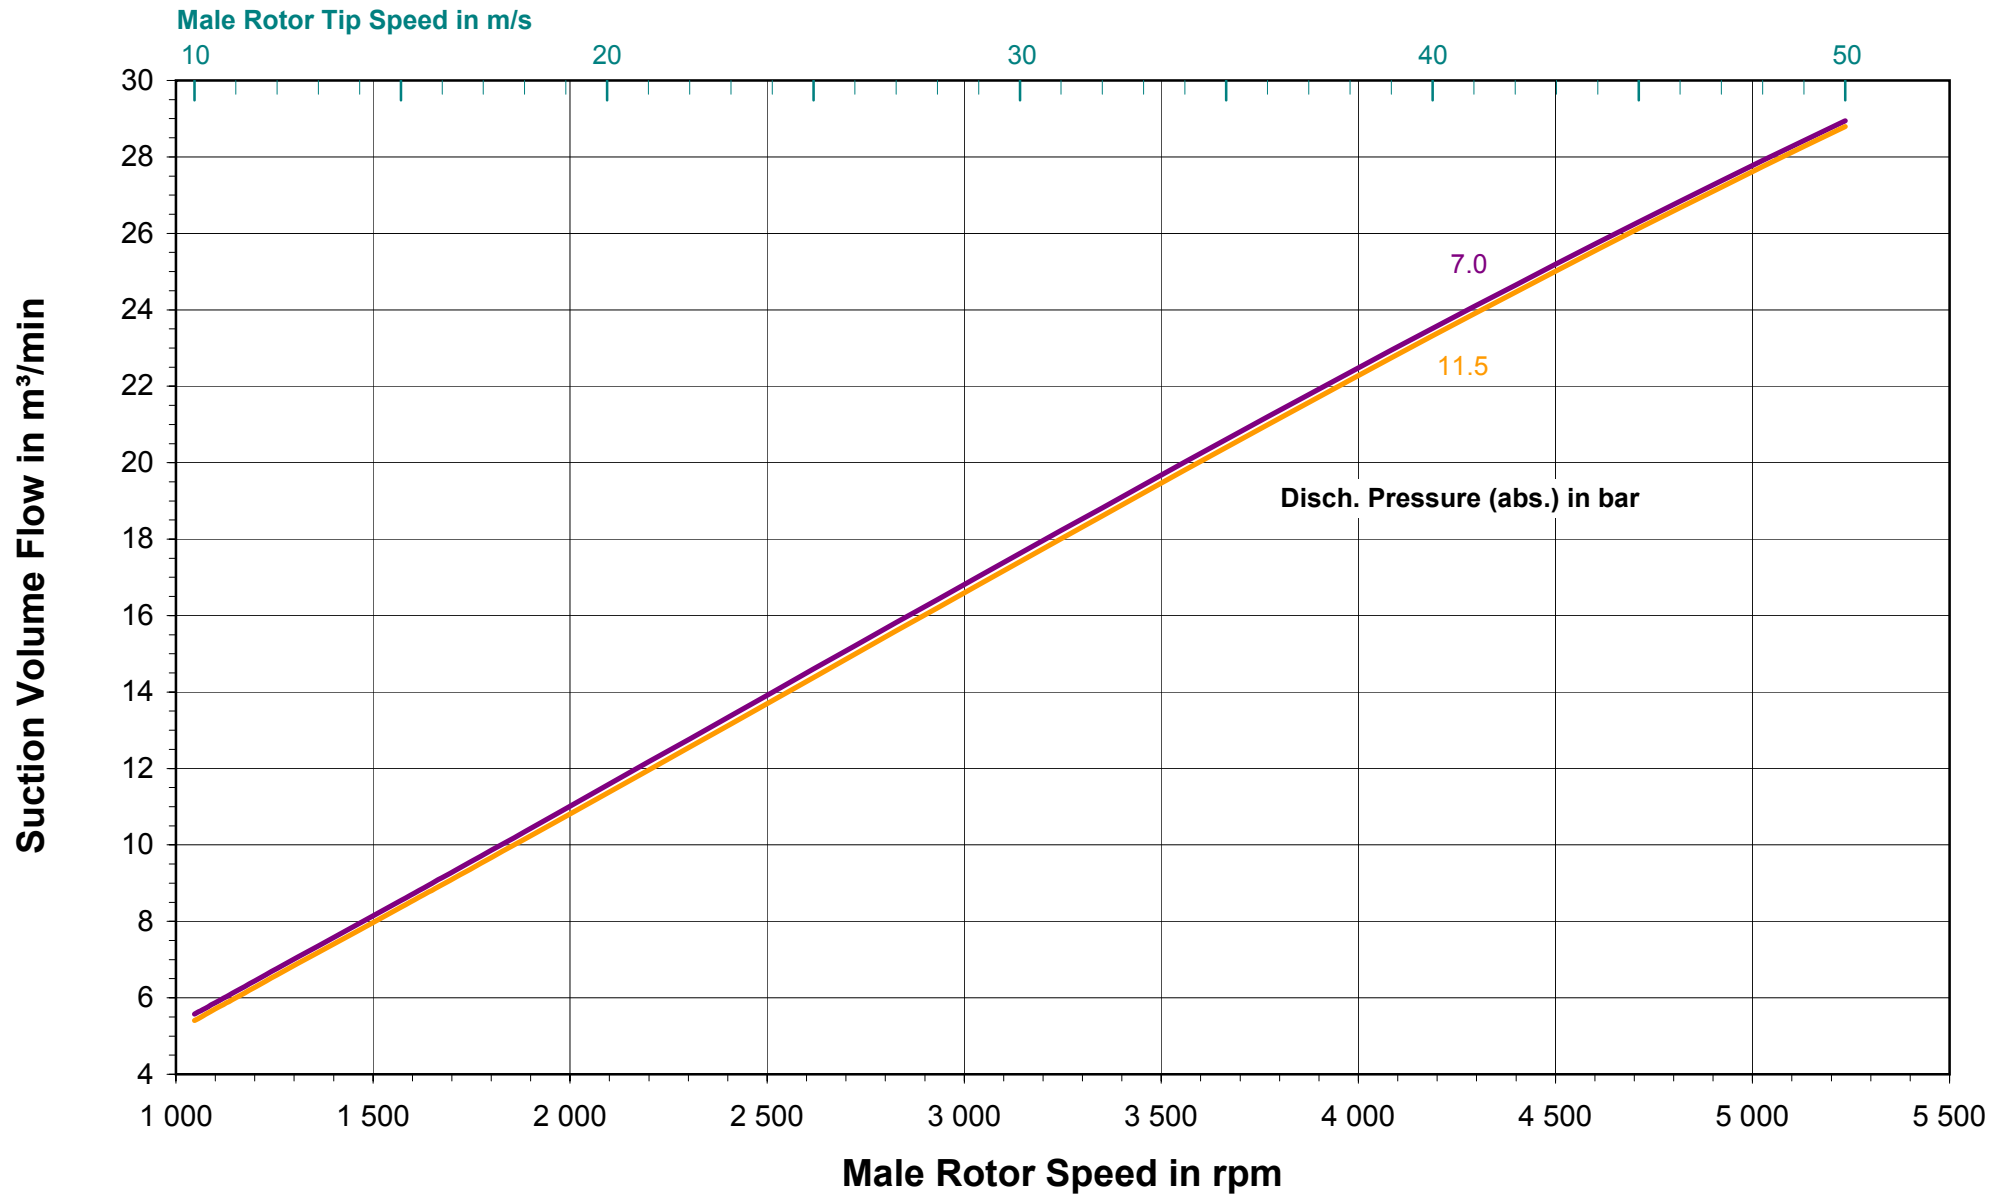


PERFORMANCE PREDICTION CF128LG/LG2/LG3

Medium: Air, rel. humidity 60 %; suction press. (abs.): 1 bar; suction temp.: 20 °C; disch. temp.: 80 °C; oil quality: ISO VG46

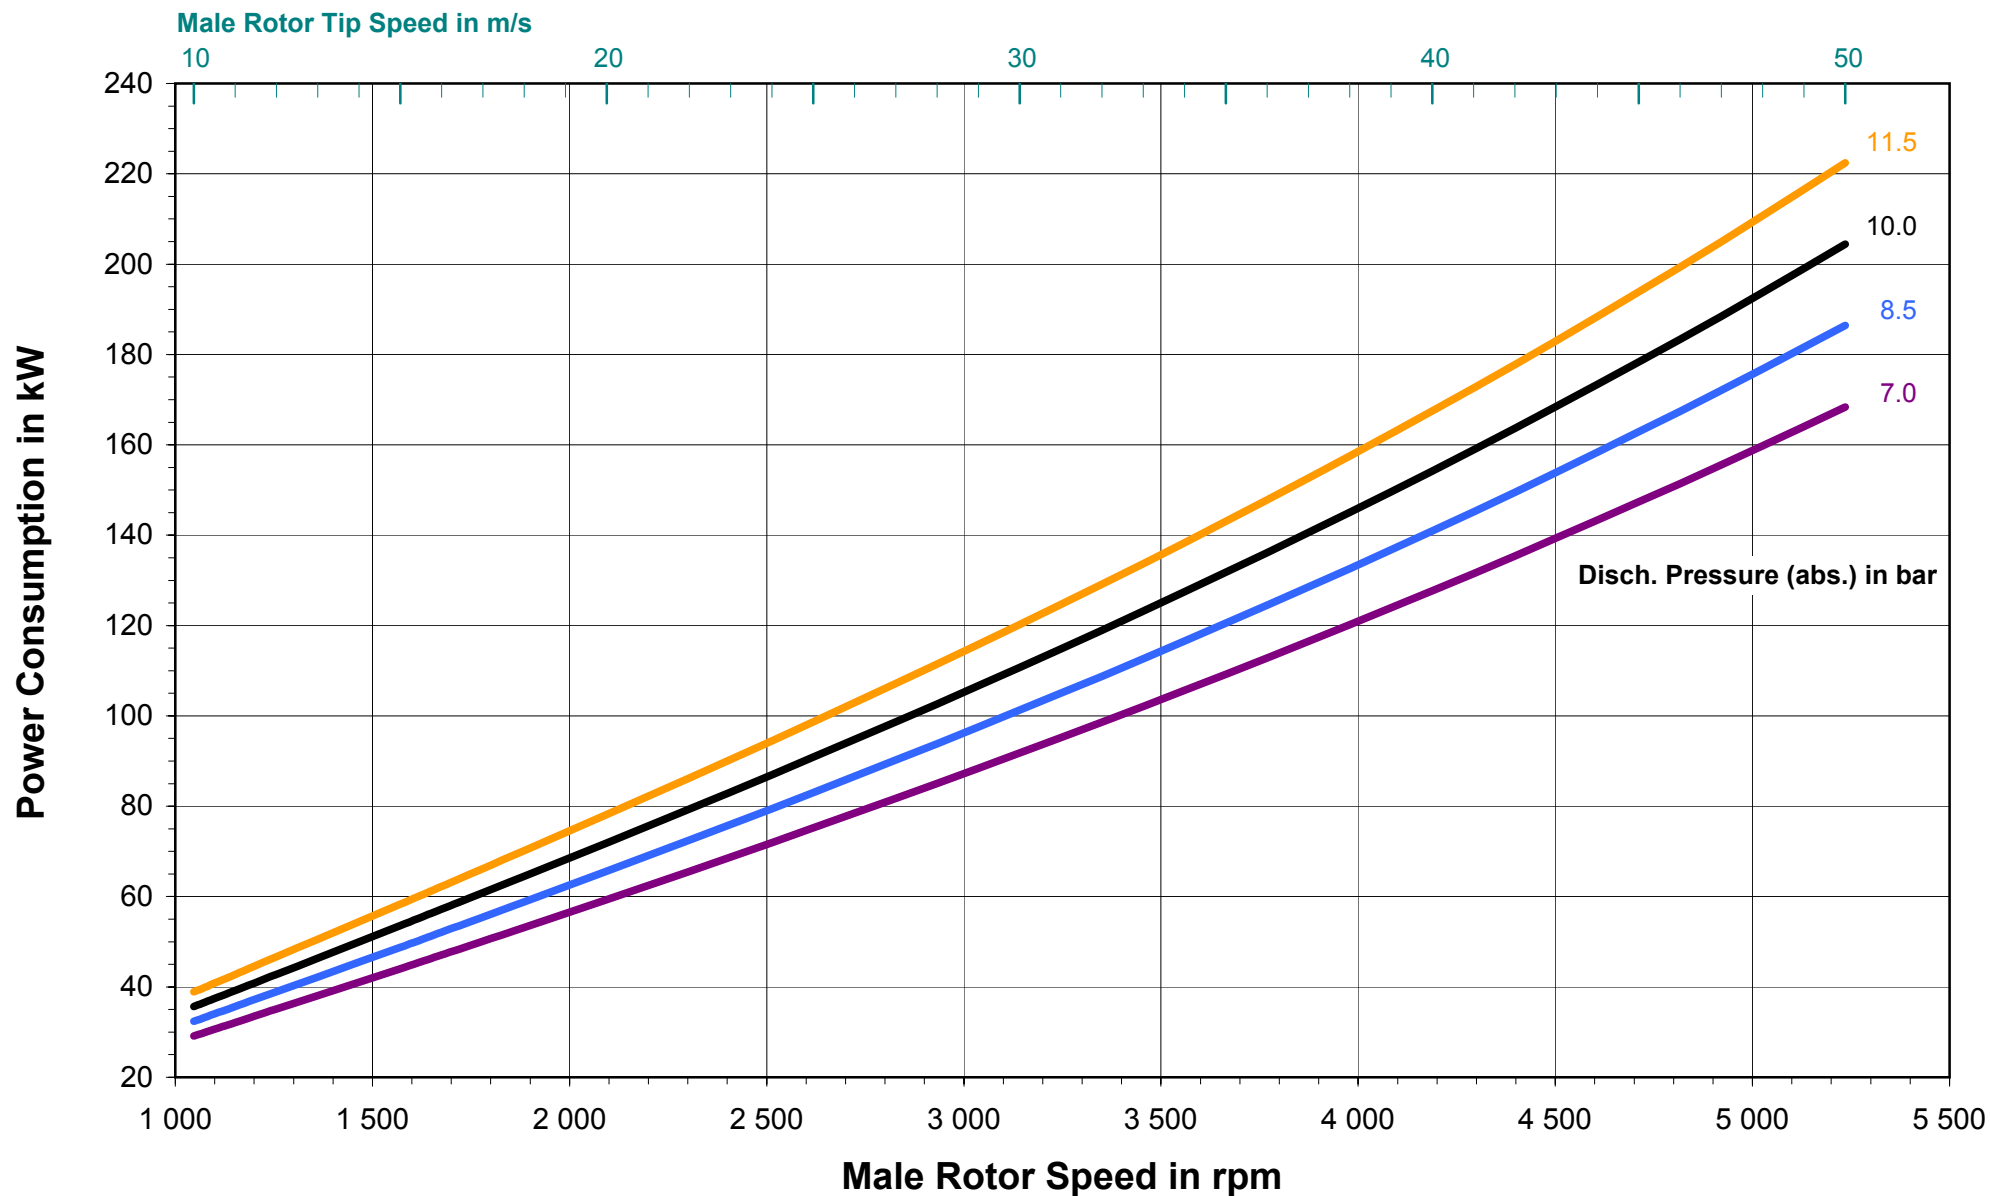

PERFORMANCE PREDICTION CF128LG/LG2/LG3

Medium: Air, rel. humidity 60 %: suction press.: 14.5 psia; suction temp.: 68 °F; disch. temp.: 176 °F; oil quality: ISO VG46

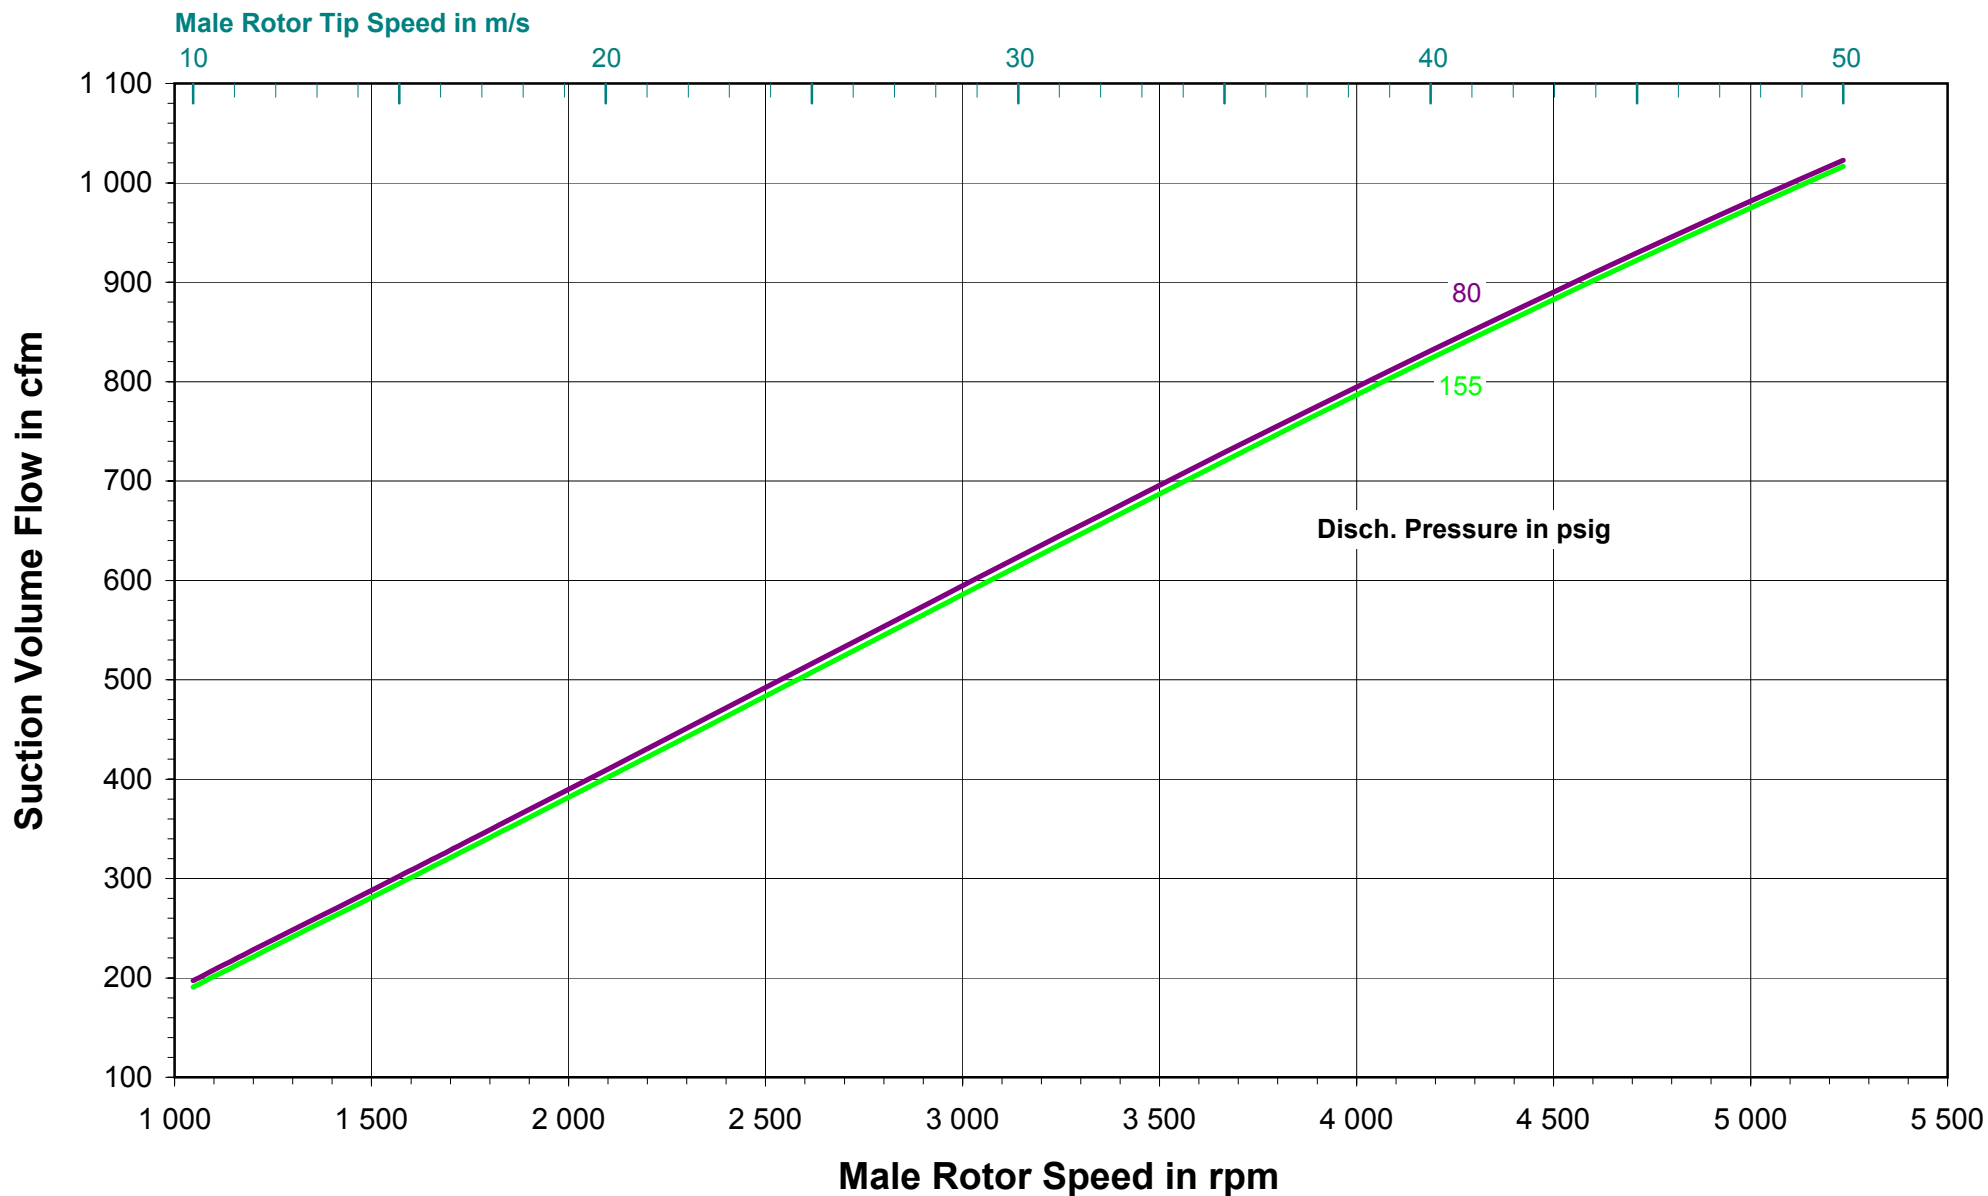

PERFORMANCE PREDICTION CF128LG/LG2/LG3

Medium: Air, rel. humidity 60 %: suction press.: 14.5 psia; suction temp.: 68 °F; disch. temp.: 176 °F; oil quality: ISO VG46

